


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2017.09.04.
1	[설번No.201904-0001] PIN 이탈 개선으로 인한 핀 변경	S.Y.EUN	I.C.KIM	2019.04.04.

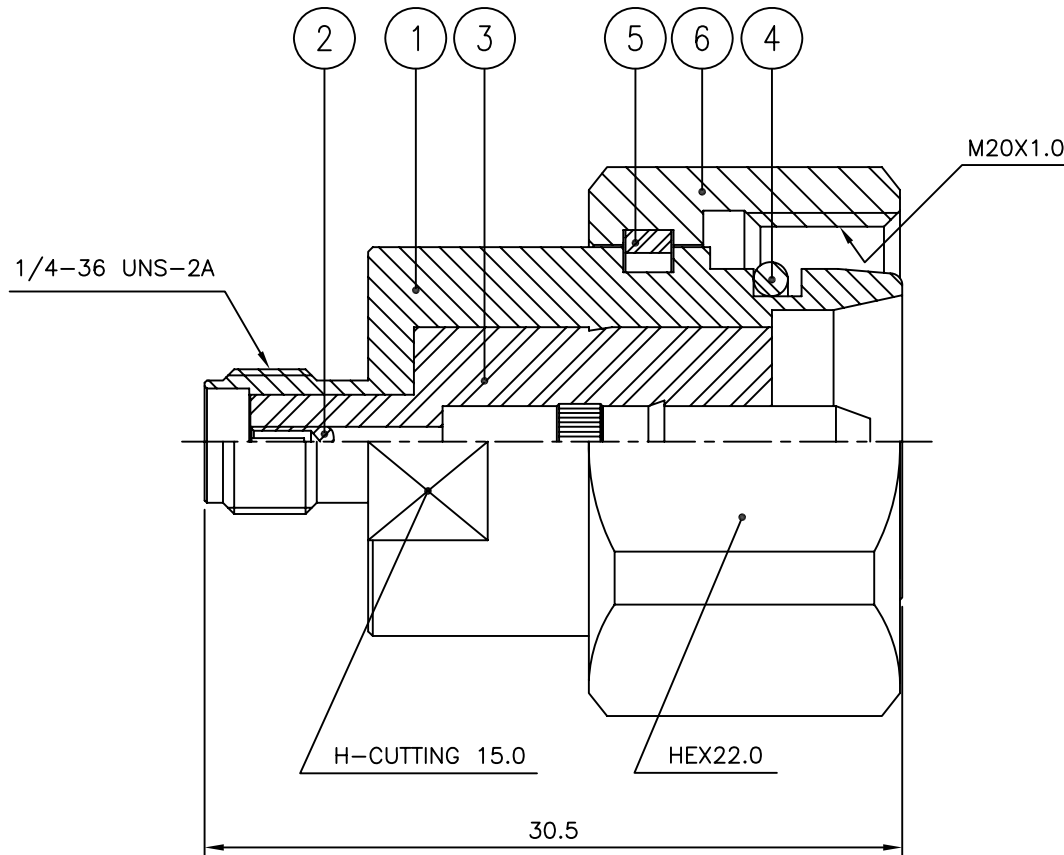

ELECTRICAL DATA

1	Frequency range	DC ~ 3.0 GHz
2	IMPEDANCE	50Ω NOMINAL
3	V.S.W.R	1.2 : 1 max
4	Insertion Loss	-0.2dB min
5	PIMD (CDMA,WCDMA)	150dBc (Min) (20W*2Tone)

6	CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU02286-5/1
5	C-RING	1	PBR	Nickel Plate	DSR00020-5/1
4	GASKET	1	SILICONE RUB		DGK00121-N/1
3	INSULATOR	1	TEFLON		DAI02479-N/1
2	CONTACT	1	BeCu C17300	Silver Plate (3μm)	DAC03284-5/2 DAC03284-5/1
1	BODY	1	MBsBD C3604BD-F	SUCO Plate	DAD00344-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.1	DATE 2019. 04. 04.		 KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		TITLE 4.3/10 DIN50 (P) SMA50 (J) ADAPTOR
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	3/1	DWG NO. AD00618-7/1 REVISION 1 SHEET 1 of 1
		UNIT	mm	

A4