


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2017.09.25.

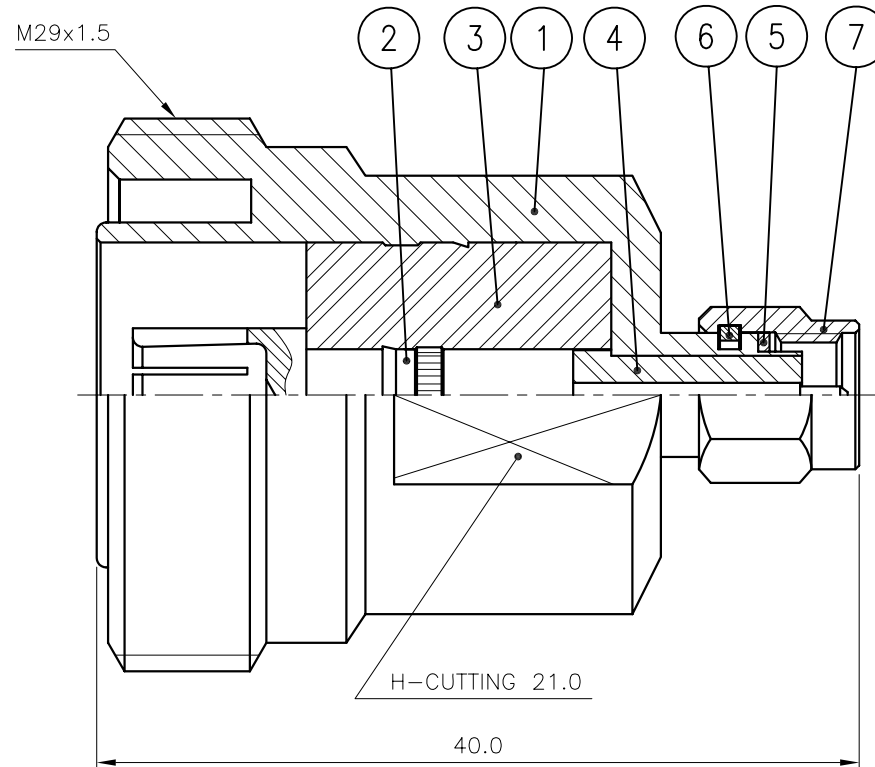

ELECTRICAL DATA

1	Frequency range	DC ~ 3.0 GHz
2	IMPEDANCE	50Ω NOMINAL
3	V.S.W.R	1.2 : 1 max
4	Insertion Loss	-0.2dB min

7	CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU00005-5/2
6	C-RING	1	SUS	Passivated	DSR00002-5/1
5	GASKET	1	SILICONE RUB		DGK00004-N/1
4	INSULATOR	1	TEFLON		DAI02481-N/1
3	INSULATOR	1	TEFLON		DAI02480-N/1
2	CONTACT	1	MBsBD C3604BD-F	Silver Plate (3μm)	DAC03285-5/1
1	BODY	1	MBsBD C3604BD-F	SUCO Plate	DAD00345-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

조립순서

1. ①번 BODY에 ④번 절연체와 ③번 절연체 순서로 조립한다.
2. ②번 PIN 조립한다.
3. ⑤번 GASKET과 ⑥번 C-RING을 조립한다.
4. ⑦번 CAP 조립한다.

TOLERANCE	Decimal	DATE 2017. 09. 25.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE 7/16 DIN50 (J) SMA50 (P) ST ADAPTOR
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	UNIT	DWG NO. AD00619-7/1 REVISION I R SHEET 1 of 1
		2.5/1	mm	

A4