


REVISION					
REV	DESCRIPTION	DRAWN	APPR	DATE	
1P	Initial Registration	S.Y.EUN	I.C.KIM	2018.11.13.	

1/4-36 UNS-2A

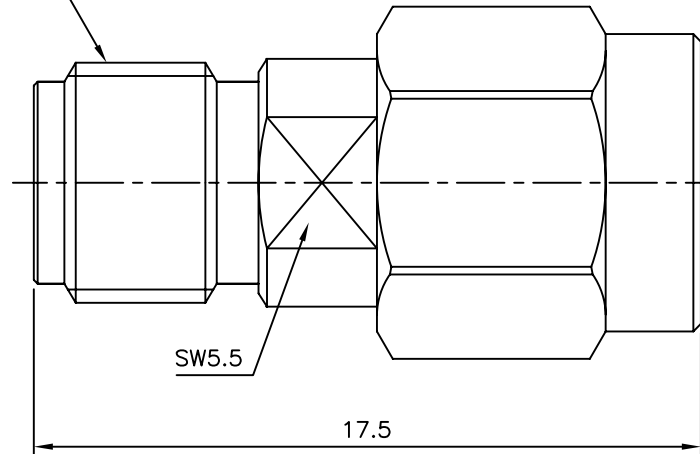

ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~40GHz
3. VSWR (Max) : 1.2

Mate compatible table	
SMA [~18GHz]	Mate
3.5mm [~26.5GHz]	
2.92mm(K) [~40GHz]	
2.4mm [~50GHz]	Mate
1.85mm(V) [~65GHz]	

Un mate

7	SPRING RING	1	SUS	Passivated	DSR00002-5/1
6	CAP	1	SUS303	Passivate	DCU00006-5/1
5	GASKET	1	SILICONE RUB		DGK00004-N/1
4	INSERT	1	SUS303	Passivate	DIS00283-5/E
3	INSULATOR	1	PEEK		DIN02942-N/C
2	CONTACT	1	BeCu C17300	Gold Plate	DAC03306-5/2
1	BODY	1	SUS303	Passivate	DAD00362-5/5
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.2	DATE 2018. 11. 13.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE SMA 2.92mm (J) SMA 2.92mm (P) ST ADAPTOR
		DRAWN BY	S.Y.EUN	
FINISH		SCALE 5/1	UNIT mm	 A4
		DWG NO.	AD00622-7/7	
		REVISION	I R	SHEET 1 of 1