


AD00623-7/1

AD00623-7/1

Frequency	
Insertion Loss	
VSWR	
Impedance	☒ 50Ω ☐ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR, SWR, dB)

■_1GHz	- 1.00, 1.00, 0.01
■_3GHz	- 1.01, 1.01, 0.03
■_6GHz	- 1.00, 1.00, 0.05
■_8GHz	- 1.02, 1.02, 0.06
■10GHz	- 1.03, 1.03, 0.07
■12GHz	- 1.05, 1.05, 0.07
■14GHz	- 1.06, 1.06, 0.09
■16GHz	- 1.01, 1.02, 0.09
■18GHz	- 1.06, 1.06, 0.11
■MaX__-	- 1.06, 1.06, 0.12

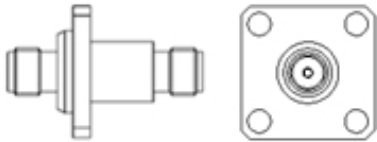

SMA (J) SMA (J) 4 HOLE
□17.5-12.7-3
L:26mm(8.7-2.3-15)
BO/NI, PI/GO

▶ NETWORK ANALYZER ▶ Test cable ▶ Test Adaptor

- ☐ E5071B (~8.5GHz)
- ☒ ZVA50 (~50GHz)
- ☒ 2.4mm Male to 2.4mm Male
50GHz Cable

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

