


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2017. 12. 14.
1	[설번No.201904-0001] PIN 이탈 개선으로 인한 편 변경	S.Y.EUN	I.C.KIM	2019. 04. 03.

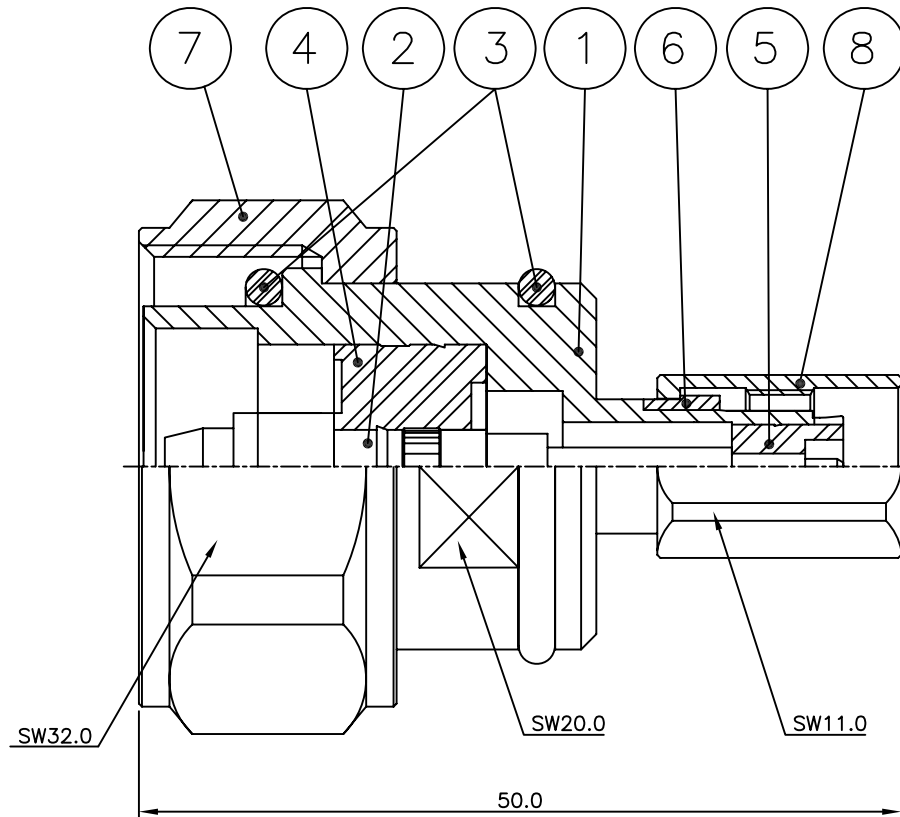

★ 전기적 특성

1	Frequency range	DC ~ 6GHz
2	Impedance	50Ω NOMINAL
3	V.S.W.R	1.2 : 1 max @ 6GHz
4	Insertion Loss	-0.2dB min
5	PIMD	166dBc (Min) (20W*2Tone)

8	CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU02295-5/1
7	CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU00078-5/2
6	INSERT	1	MBsBD C3604BD-F	SUCO	DIS00278-5/1
5	INSULATOR	1	TEFLON		DIN02963-N/1
4	INSULATOR	1	TEFLON		DIN01680-N/1
3	GASKET	2	SILICONE RUB		DGK00054-N/1
2	CONTACT	1	MBsBD C3604BD-F	Silver(5μm)	DAC03292-5/2 DAC03292-5/1
1	BODY	1	MBsBD C3604BD-F	SUCO	DAD00354-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2019. 04. 03.			 KJ COMTECH CO.,LTD.	RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	±0.1	APPROVED BY	I.C.KIM					
	Angle							
MATERIAL	±1°	CHECKED BY	TITLE 7/16 DIN50 (P) NEW10 (P) ADAPTOR					
	-	DRAWN BY				S.Y.EUN		
FINISH	-	SCALE 2/1	UNIT mm		A4	DWG NO. AD00629-7/1		
						REVISION 1	SHEET 1 of 1	