


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2018.01.22.
1	[실변No.201807-0005] 메이팅 개선으로 인한 GASKET 경도 변경 (경도60%→40%)	S.Y.EUN	I.C.KIM	2018.07.11.

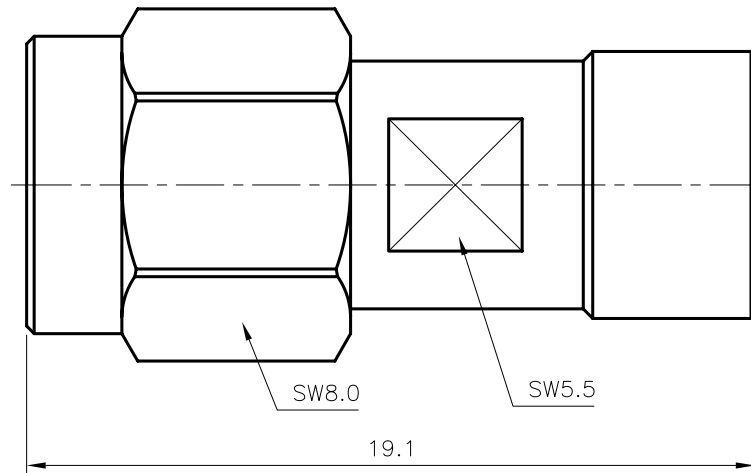

★IPX4적용

ELECTRICAL DATA

1	Frequency range	DC ~ 3.0 GHz
2	IMPEDANCE	50Ω NOMINAL
3	V.S.W.R	1.2 : 1 max
4	Insertion Loss	-0.2dB min

- 방수 : IPX4 규격 적용

9	SPRING RING	1	SUS	Passivated	DSR00002-5/1
8	CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU00005-5/2
7	JACK	1	BeCu C17300	Nickel Plate	DJA00159-5/9
6	GASKET	1	SILICONE RUB		DGK00317-N/2 DGK00317-N/1
5	GASKET	1	SILICONE RUB		DGK00004-N/1
4	INSULATOR	1	TEFLON		DIN02969-N/1
3	INSULATOR	1	TEFLON		DIN02133-N/1
2	CONTACT	1	BeCu C17300	Gold Plate	DAC03294-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DAD00356-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2018. 07. 11.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE SMA50 (P) REVERSE SMBL50 (J) ST ADAPTOR
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	5/1	A4 DWG NO. AD00632-7/1 REVISION 1 SHEET 1 of 1
		UNIT	mm	