


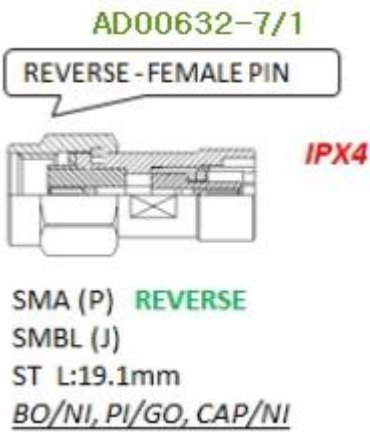

AD00632-7/1	
Frequency	
Insertion Loss	
VSWR	
Impedance	☒ 50Ω ☐ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21 (SWR, SWR, dB)			
☒ _1.0GHz	- 1.01,	1.01,	0.04
☒ _2.0GHz	- 1.02,	1.02,	0.10
☒ _3.0GHz	-		
☒ _4.0GHz	- 1.03,	1.03,	0.15
☒ _5.0GHz	- 1.06,	1.05,	0.17
☒ _6.0GHz	- 1.18,	1.18,	0.24

☒ _7.0GHz	- 1.37,	1.31,	0.35
☒ _8.0GHz	- 1.39,	1.24,	0.52

▶ NETWORK ANALYZER

▶ Test cable

▶ Test Adaptor

- ☐ E5071B (~8.5GHz)
- ☒ N Male to SMA Male
- ☐ ZVA50 (~50GHz)
- 10GHz Cable (CF00540-7/1)
- ☒ ZND (~8.5GHz)

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

