


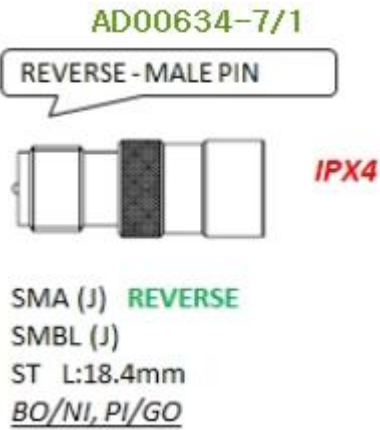

AD00634-7/1	
Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

S11/S22/S21 (SWR, SWR, dB)		
■_1.0GHz	- 1.00, 1.02, 0.04	
■_2.0GHz	- 1.04, 1.04, 0.09	
■_3.0GHz	- ****, ****, ****	
■_4.0GHz	- 1.06, 1.05, 0.14	
■_5.0GHz	- 1.09, 1.05, 0.14	
■_6.0GHz	- 1.13, 1.12, 0.18	

■_7.0GHz	- 1.35, 1.33, 0.25	
■_8.0GHz	- 1.40, 1.38, 0.28	

▶ NETWORK ANALYZER ▶ Test cable ▶ Test Adaptor

- ☐ E5071B (~8.5GHz)
- ☐ ZVA50 (~50GHz)
- ☒ ZND (~8.5GHz)
- ☒ N Male to SMA Male
- 10GHz Cable (CF00540-7/1)

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

