


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2018.03.06.
1	[설번No.201904-0001] PIN 이탈 개선으로 인한 편 변경	S.Y.EUN	I.C.KIM	2019.04.04.

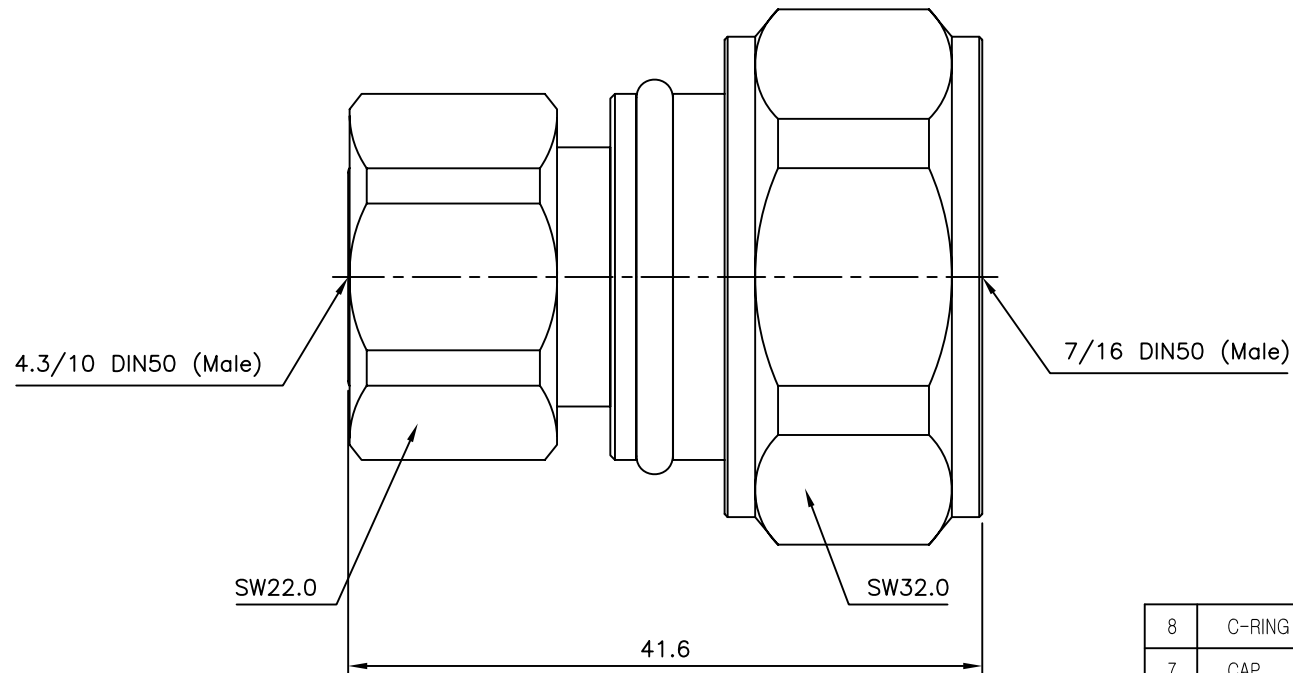

ENVIRONMENTAL DATA :

1. TEMPERATURE RANGE : -40°C ~ +85°C

ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~3GHz
3. VSWR (Max) : 1.2
4. INSERTION LOSS : 0.3dB (Max)
5. PIMD (-43dBm / 2tone) 3rd Order IMD : -160dBc (Min)

8	C-RING	1	PBR	Nickel Plate	DSR00020-5/1
7	CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU00078-5/2
6	CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU02286-5/1
5	INSULATOR	1	TEFLON		DIN02536-N/1
4	GASKET	2	SILICONE RUB		DGK00054-N/1
3	GASKET	1	SILICONE RUB		DGK00121-N/1
2	CONTACT	1	MBsBD C3604BD-F	Silver Plate (3μm)	DAC03299-5/2 DAC03299-5/1
1	BODY	1	MBsBD C3604BD-F	SUCO Plate	DAD00359-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2019. 04. 04.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE 4.3/10 DIN50 (P) 7/16 DIN50(P) ADAPTOR
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	2/1	DWG NO. AD00637-7/1 REVISION 1 SHEET 1 of 1
		UNIT	mm	

A4