


AD00641-7/1

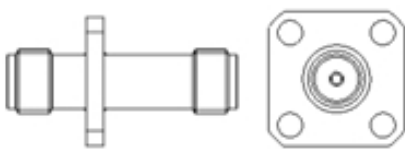

SMA (J) SMA (J)
4 HOLE 12.7-8.6-2.7
L:22.7mm(7.8-1.7-13.2)
BO/GO, PI/GO

AD00641-7/1	
Frequency	
Insertion Loss	
VSWR	
Impedance	50Ω 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR, SWR, dB)	
1GHz	1.01, 1.01, 0.01
3GHz	1.01, 1.01, 0.05
6GHz	1.02, 1.02, 0.06
8GHz	1.02, 1.02, 0.08
10GHz	1.03, 1.03, 0.09
12GHz	1.06, 1.05, 0.10
14GHz	1.10, 1.09, 0.12
16GHz	1.12, 1.12, 0.13
18GHz	1.08, 1.08, 0.13
MaX_	1.12, 1.12, 0.13

► NETWORK ANALYZER

► Test cable

► Test Adaptor

- ☐ E5071B (~8.5GHz)
- ☒ ZVA50 (~50GHz)
- ☒ 2.4mm Male to 2.4mm Male
- ☐ 50GHz Cable

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

