


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2018.09.14.
1	GASKET 제거 및 I/L 특성 개선 PIN 도금두께 변경	S.Y.EUN	I.C.KIM	2019.02.12.

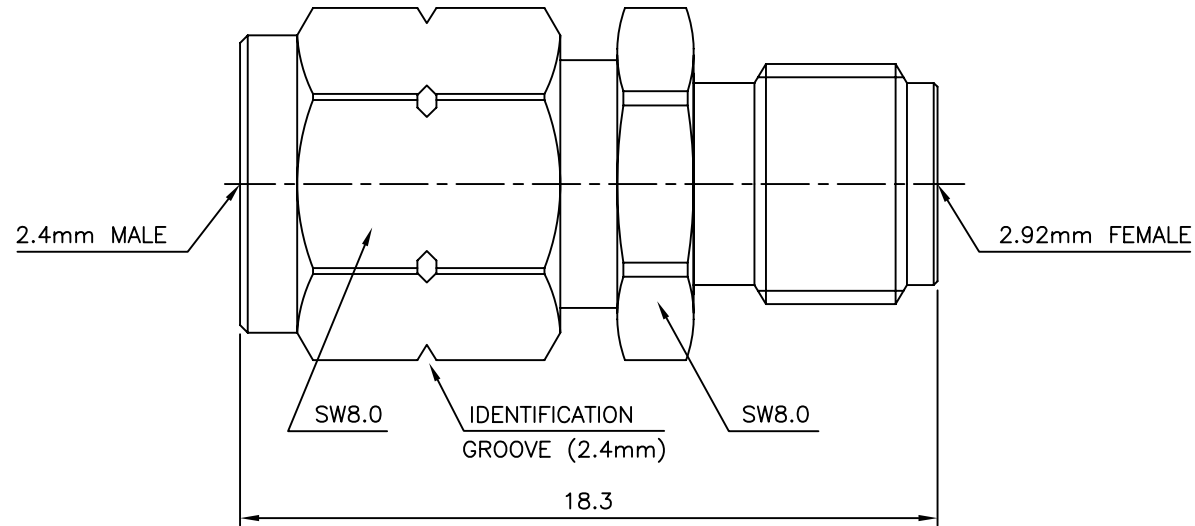

ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~40GHz
3. VSWR (Max) : 1.2

Mate compatible table	
SMA [~18GHz]	Mate
3.5mm [~26.5GHz]	
2.92mm(K) [~40GHz]	
2.4mm [~50GHz]	Mate
1.85mm(V) [~65GHz]	

Un mate

7	SPRING RING	1	SUS	Passivated	DSR00002-5/1
6	CAP	1	SUS	Passivated	DCU02297-5/2
5	INSERT	1	SUS	Passivated	DIS00283-5/D
4	INSULATOR	1	PEEK		DIN02996-N/2
3	GASKET	1	SILICONE RUB		DGK00004-N/1
2	CONTACT	1	BeCu C17300	Gold Plate 1.3μm	DAC03305-5/4
1	BODY	1	SUS	Passivated	DAD00366-5/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2019. 02. 12.			 KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM		
	±1°	CHECKED BY			
MATERIAL	_____	DRAWN BY	S.Y.EUN		TITLE 2.4mm (P) 2.92mm (J) ST ADAPTOR
FINISH	_____	SCALE 5/1	UNIT mm		A4
					DWG NO. AD00643-7/2
					REVISION 1
					SHEET 1 of 1