


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2018.09.13.
1	GASKET 제거 및 I/L 특성 개선 PIN 도금두께 변경	S.Y.EUN	I.C.KIM	2019.02.12.
2	특성개선으로 인한 핀 변경	S.Y.EUN	I.C.KIM	2020.12.29.

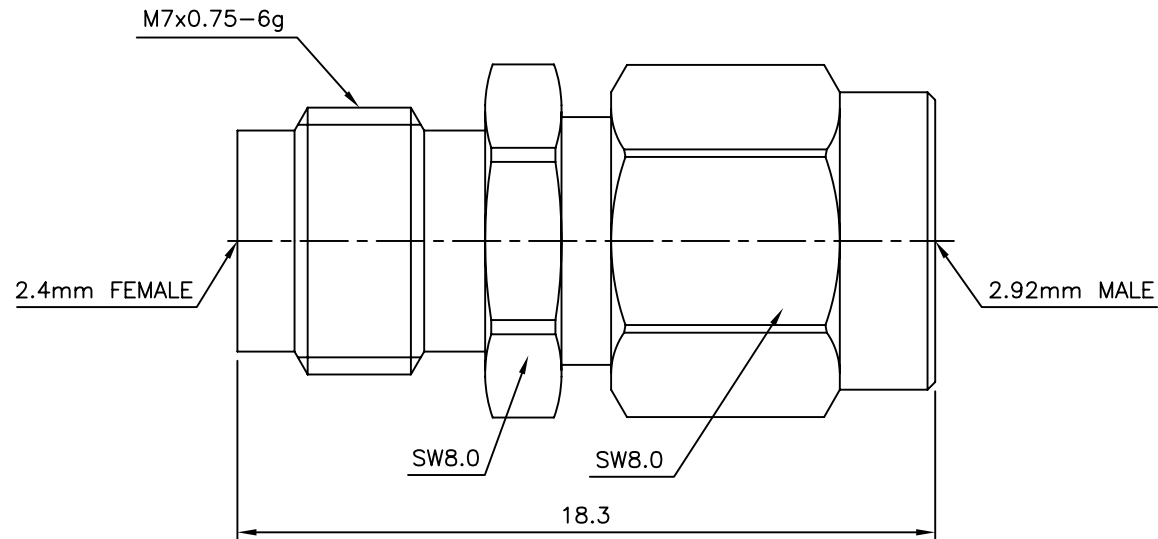

ELECTRICAL DATA


1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~40GHz
3. VSWR (Max) : 1.2

Mate compatible table	
SMA [~18GHz]	Mate
3.5mm [~26.5GHz]	
2.92mm(K) [~40GHz]	
2.4mm [~50GHz]	Mate
1.85mm(V) [~65GHz]	

Un mate

6	SPRING RING	1	SUS	Passivated	DSR00002-5/1
5	CAP	1	SUS	Passivated	DCU00006-5/1
4	INSERT	1	SUS	Passivated	DIS00283-5/C
3	INSULATOR	1	PEEK		DIN02996-N/2
3	GASKET	1	SILICONE RUB		DGK00004-N/1
2	CONTACT	1	BeCu C17300	Gold Plate 1.3μm	DAC03309-5/6 DAC03309-5/4
1	BODY	1	SUS	Passivated	DAD00368-5/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2020. 12. 29.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE 2.4mm (J) 2.92mm (P) ST ADAPTOR
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	5/1	DWG NO. AD00646-7/2 REVISION 2 SHEET 1 of 1
		UNIT	mm	



A4