


* ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~10GHz
3. DIELECTRIC WITHSTANDING VOLTAGE : 500 VRMS (Min)

* MECHANICAL DATA

1. DURABILITY : 100 MATING CYCLES Min
2. TEMPERATURE RANGE : -65°C to +165°C

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019. 02. 21.

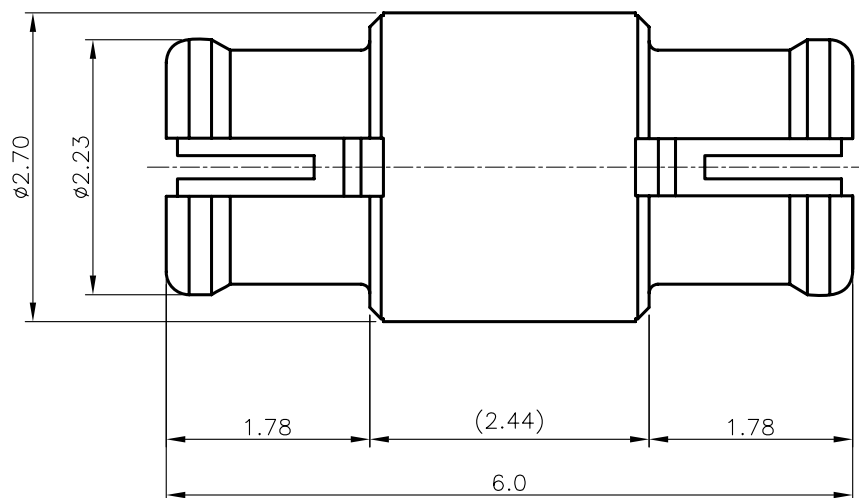

3	INSULATOR	1	TEFLON		DIN03027-N/2
2	CONTACT	1	BeCu C17300	Gold Plate	DAC03322-5/2
1	BODY	1	BeCu C17300	Gold Plate	DAD00379-5/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2019. 02. 21.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017			
	Angle	APPROVED BY	I.C.KIM					
		±1°	CHECKED BY			TITLE SMPM50 (J) SMPM50 (J)		
MATERIAL	_____	DRAWN BY	S.Y.EUN					
FINISH	_____	SCALE 15/1	UNIT mm		A4	DWG NO.	AD00660-7/2	
						REVISION	I R	SHEET 1 of 1

A4	DWG NO.	AD00660-7/2
	REVISION	I R SHEET 1 of 1