


* ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~10GHz
3. DIELECTRIC WITHSTANDING VOLTAGE : 500 VRMS (Min)

* MECHANICAL DATA

1. DURABILITY : 100 MATING CYCLES Min
2. TEMPERATURE RANGE : -65°C to +165°C

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019. 10. 07.

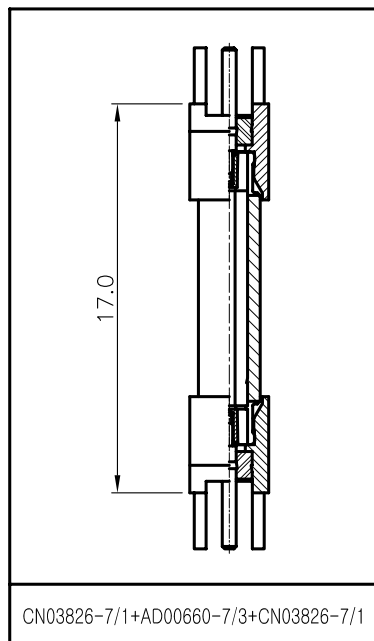

3	INSULATOR	1	TEFLON		DIN03027-N/3
2	CONTACT	1	BeCu C17300	Gold Plate	DAC03322-5/3
1	BODY	1	BeCu C17300	Gold Plate	DAD00379-5/3
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

* 조립방법 *

1. 절연체를 반 커팅한다.
1. ③번 커팅한 절연체 측면으로 ②번 PIN 조립
2. JIG 이용하여 ①번 BODY + ③번 절연체 조립

TOLERANCE	Decimal	DATE 2019. 10. 07.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		TITLE SMPM50 (J) SMPM50 (J)
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	10/1	DWG NO. AD00660-7/3 REVISION I R SHEET 1 of 1
		UNIT	mm	

