


* ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~10GHz
3. DIELECTRIC WITHSTANDING VOLTAGE : 500 VRMS (Min)

* MECHANICAL DATA

1. DURABILITY : 100 MATING CYCLES Min
2. TEMPERATURE RANGE : -65°C to +165°C

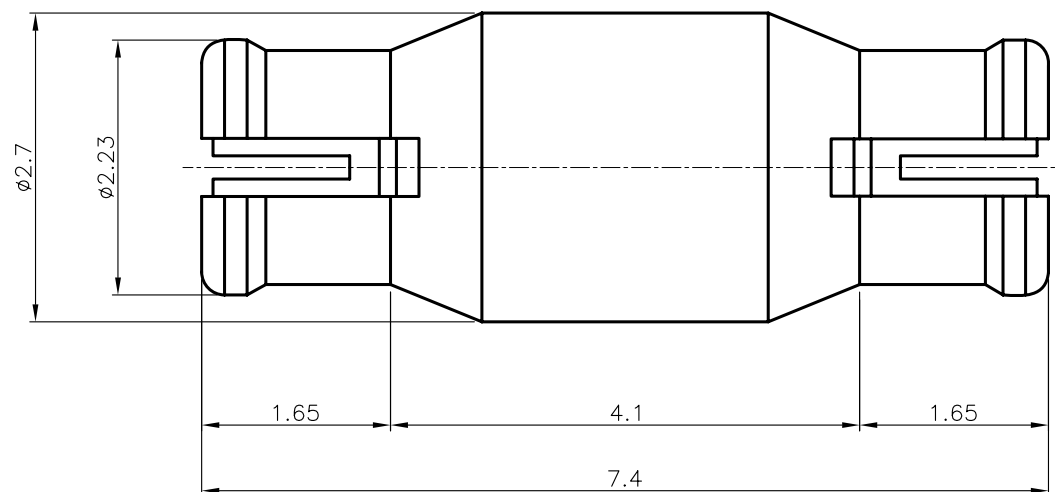

* 조립방법 *

1. ③번 커네팅 절연체 측면으로 ②번 PIN 조립
2. JIG 이용하여 ①번 BODY + ③번 절연체 조립

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM		2019. 12. 30.

3	INSULATOR	1	TEFLON		DIN03027-N/4
2	CONTACT	1	BeCu C17300	Gold Plate	DAC03322-5/4
1	BODY	1	BeCu C17300	Gold Plate	DAD00379-5/4
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2019. 12. 30.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY		
MATERIAL		CHECKED BY		TITLE SMPM50 (J) SMPM50 (J) ADAPTOR
		DRAWN BY	I.C.KIM	
FINISH		SCALE	UNIT	DWG NO. AD00660-7/4 REVISION I R SHEET 1 of 1
		15/1	mm	

A4