


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019.05.23.

ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~40GHz
3. VSWR (Max) : 1.25

Mate compatible table	
SMA [~18GHz]	Mate
3.5mm [~26.5GHz]	
2.92mm(K) [~40GHz]	
2.4mm [~50GHz]	Mate
1.85mm(V) [~65GHz]	

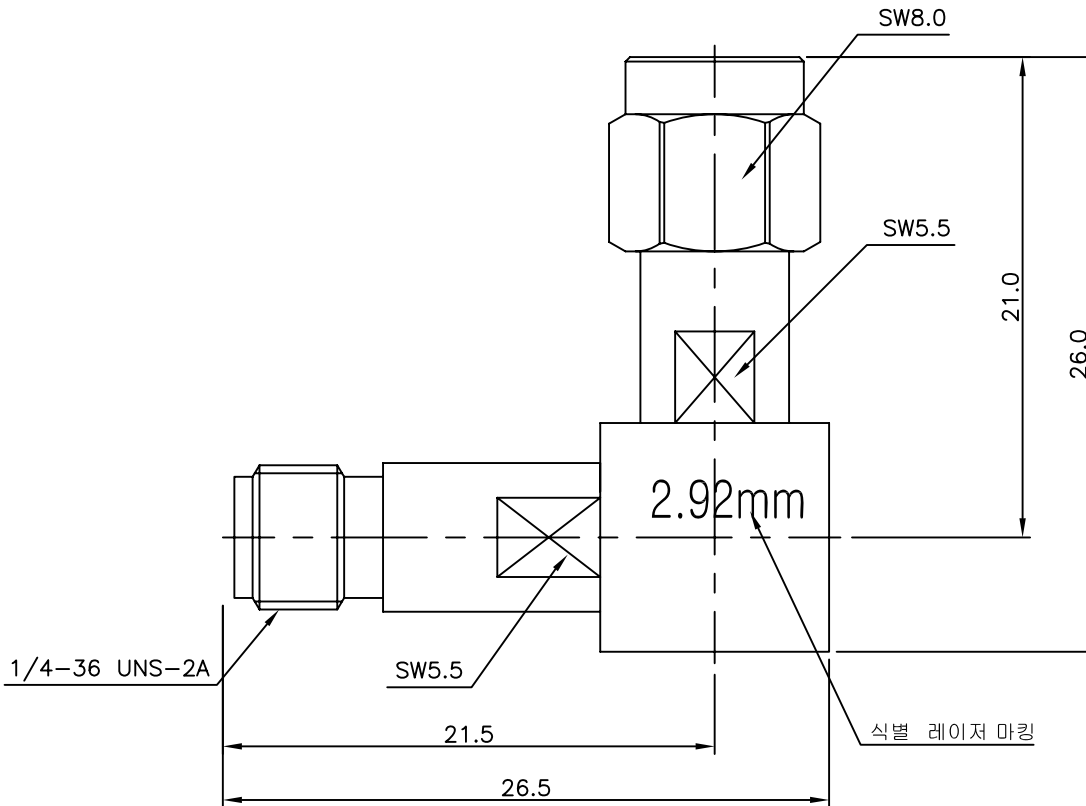

12	COUPLING CAP	1	SUS303	Passivated	DCU00006-5/1
11	C-RING	1	SUS303	부동태처리	DSR00002-5/1
10	INSULATOR	1	PEEK		DIN03042-N/1
9	INSULATOR	2	PEEK		DIN02996-N/2
8	CONTACT (C)	1	MBsBD C3604BD-F	Gold Plate (1μm)	DCT03993-5/2
7	CONTACT (B)	1	BeCu C17300	Gold Plate (1μm)	DCT03992-5/5
6	CONTACT (A)	1	BeCu C17300	Gold Plate (1μm)	DCT03991-5/5
5	INSERT (B)	1	SUS303	Passivated	DIS00294-5/2
4	INSERT (A)	1	SUS303	Passivated	DIS00293-5/2
3	BODY (C)	1	SUS303	Passivated	DBD04461-5/2
2	BODY (B)	1	SUS303	Passivated	DBD04460-5/2
1	BODY (A)	1	MBsBD C3604BD-F	SUCO Plate (1~1.5μm)	DBD04459-5/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2019. 05. 23.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		KJ COMTECH CO.,LTD. TITLE 2.92mm (J) to 2.92mm (P) RA ADAPTOR
		DRAWN BY	S.Y.EUN	
FINISH		SCALE	UNIT	A4 DWG NO. AD00661-7/3 REVISION I R SHEET 1 of 1
		3/1	mm	