


* 사각바디 식별 레이저 마킹 할 것 (2.92mm)

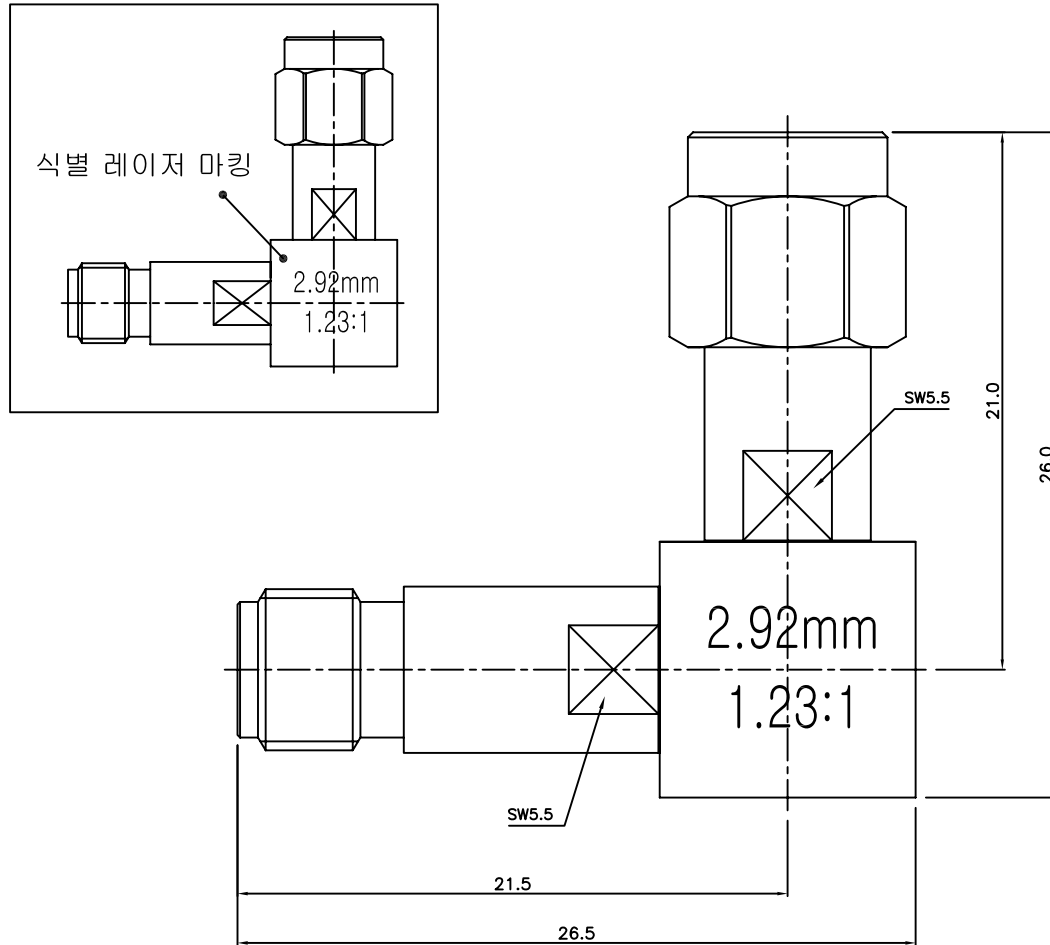

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2021.02.16.

ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~40GHz
3. VSWR (Max) : 1.23

Mate compatible table	
SMA [~18GHz]	Mate
3.5mm [~26.5GHz]	
2.92mm(K) [~40GHz]	
2.4mm [~50GHz]	Mate
1.85mm(V) [~65GHz]	

9	COUPLING CAP	1	SUS303	Passivated	DCU00006-5/1
8	C-RING	1	SUS303	Passivated	DSR00002-5/1
7	INSERT	2	SUS303	Passivated	DIS00328-5/1
6	INSULATOR	2	PEEK		DIN03192-N/1
5	CONTACT (B)	1	MBsBD C3604BD-F	Gold Plate (1μm)	DCT04185-5/1
4	CONTACT (A)	1	BeCu C17300	Gold Plate (1μm)	DCT04184-5/1
3	BODY (C)	1	SUS303	Passivated	DBD04692-5/1
2	BODY (B)	1	SUS303	Passivated	DBD04691-5/1
1	BODY (A)	1	MBsBD C3604BD-F	SUCO Plate (1~1.5μm)	DBD04459-5/4
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE	2021. 02. 16.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017				
	Angle	APPROVED BY	I.C.KIM						
MATERIAL	±1°	CHECKED BY	TITLE 2.92mm (J) to 2.92mm (P) RA ADAPTOR						
		DRAWN BY				S.Y.EUN			
FINISH	SCALE	5/1	UNIT	mm		A3	DWG NO.	AD00661-7/4	
							REVISION	I R	SHEET