


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019.07.11.

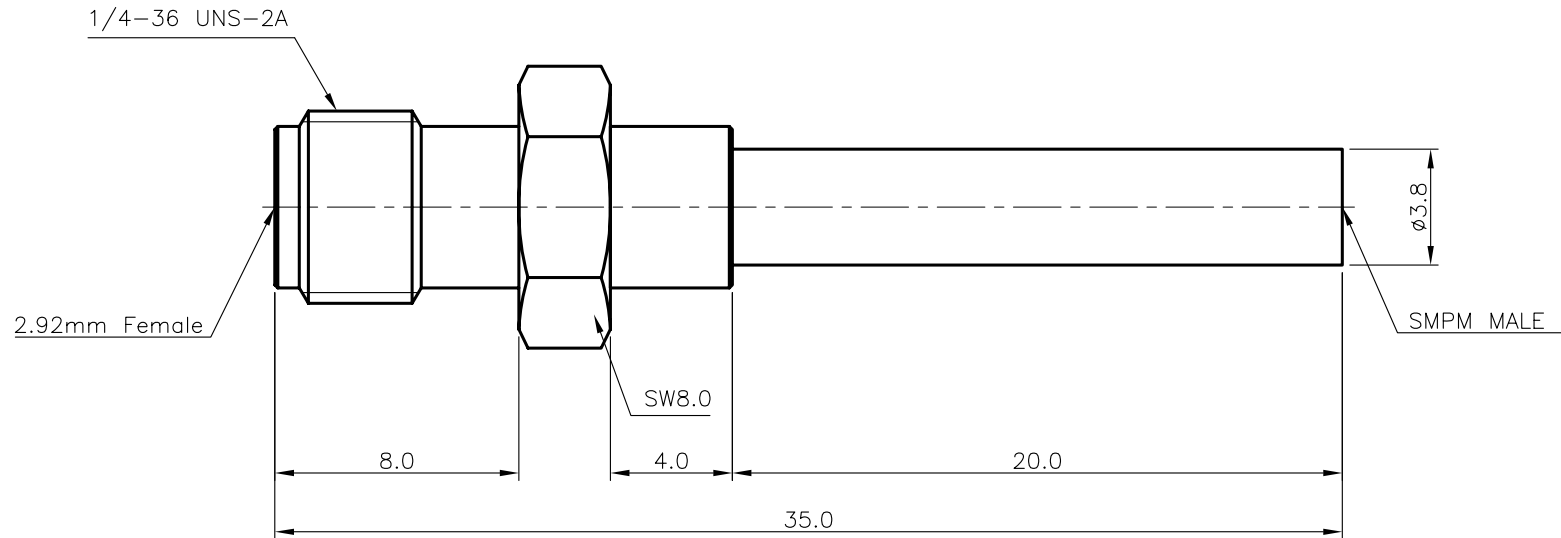

ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~40GHz
3. VSWR (Max) : 1.3

Mate compatible table	
SMA [~18GHz]	Mate
3.5mm [~26.5GHz]	
2.92mm(K) [~40GHz]	
2.4mm [~50GHz]	Mate
1.85mm(V) [~65GHz]	

Un mate

5	INSERT	1	MBsBD C3604BD-F	Nickel Plate	DIS00283-5/A
4	INSULATOR	1	TEFLON		DIN03062-N/1
3	INSULATOR	1	PEEK		DIN02942-N/C
2	CONTACT	1	BeCu C17300	Gold Plate	DAC03324-5/3
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DAD00380-5/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2019. 07. 11.			 KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	± 0.2	APPROVED BY I.C.KIM			
	Angle				
MATERIAL	$\pm 1^\circ$	CHECKED BY			TITLE 2.92mm (J) SMPM50 (P) ST ADAPTOR - SMOOTH BORE
	_____	DRAWN BY S.Y.EUN			
FINISH	_____	SCALE 4/1	UNIT mm		A4
		DWG NO. AD00662-7/2			
		REVISION I R		SHEET 1 of 1	