


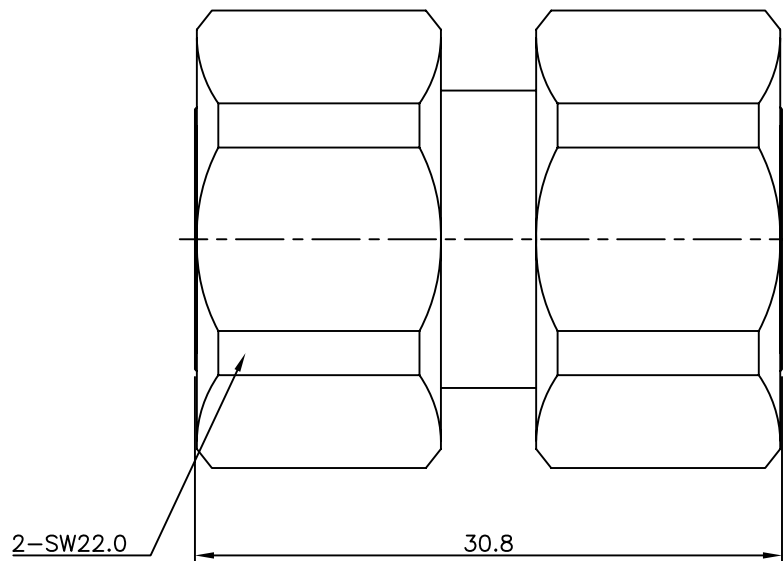

ENVIRONMENTAL DATA :

1. TEMPERATURE RANGE : -40°C ~ +85°C


ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~3GHz
3. VSWR (Max) : 1.2
4. INSERTION LOSS : 0.2dB (Max)
5. PIMD (-43dBm / 2tone) 3rd Order IMD : -160dBc (Min)

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019.02.26.

6	CAP	2	MBsBD C3604BD-F	Nickel Plate	DCU02282-5/1
5	INSULATOR	1	TEFLON		DIN03039-N/1
4	GASKET	2	SILICONE RUB		DGK00121-N/1
3	CONTACT	1	MBsBD C3604BD-F	Silver Plate (5μm)	DAC03325-5/1
2	BODY (B)	1	MBsBD C3604BD-F	SUCO Plate	DBD04471-5/1
1	BODY (A)	1	MBsBD C3604BD-F	SUCO Plate	DBD04470-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2019. 02. 26.		 KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY		TITLE 4.3/10 DIN50 (P) 4.3/10 DIN50 (P) ADAPTOR
		DRAWN BY	S.Y.EUN	
FINISH		SCALE 2.5/1	UNIT mm	 A4
		DWG NO.	AD00663-7/1	
		REVISION	IR	SHEET 1 of 1