


AD00678-7/1



SMA(P) SMBL (J)
ST L:18.8mm
BODY/Nickel PIN/Gold
HEX-CAP/BR/NI

AD00678-7/1

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

S11/S22/S21(SWR, SWR, dB)

■_1.0GHz - 1.04, 1.05, 0.18
■_2.0GHz - 1.08, 1.09, 0.20
■_3.0GHz - 1.05, 1.05, 0.19
■_4.0GHz - 1.03, 1.03, 0.19
■_5.0GHz - 1.08, 1.07, 0.13
■_6.0GHz - 1.16, 1.19, 0.02

■_7.0GHz - 1.19, 1.22, 0.01
■_8.0GHz - 1.17, 1.19, 0.04


► NETWORK ANALYZER ► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)

□ ZVA50 (~50GHz)

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3 : Insertion Loss (S21)

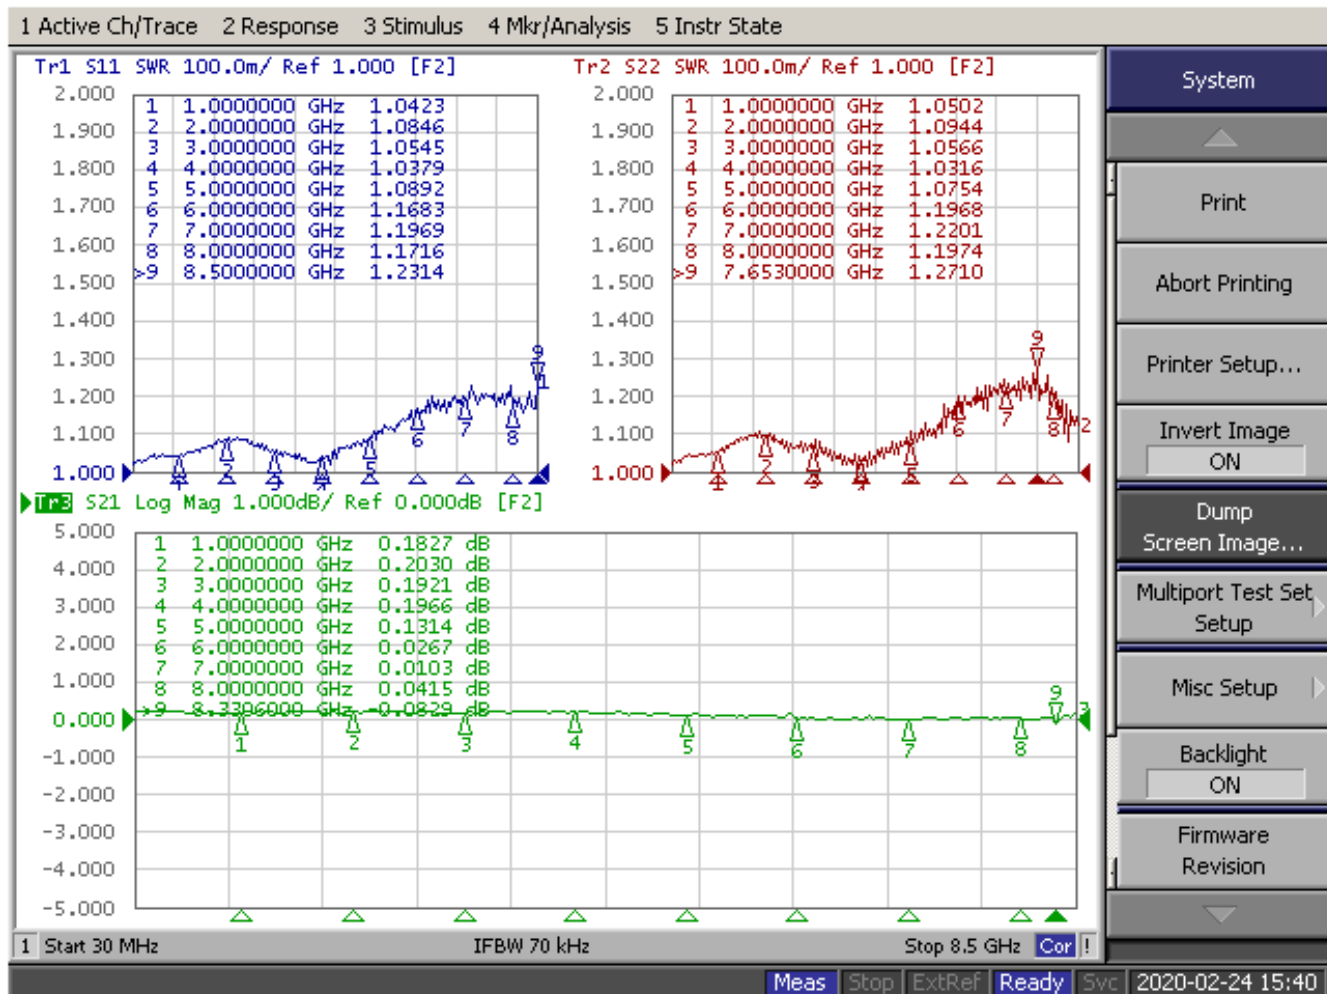

System

Print

Abort Printing

Printer Setup...

Invert Image

ON

Dump
Screen Image...

Multiport Test Set
Setup

Misc Setup

Backlight

ON

Firmware
Revision