


ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~8.5GHz
3. VSWR (Max) : 1.2
4. INSERTION LOSS (Max) : 0.2dB

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM		2020.09.02.
1	BODY + CAP 억지끼움부 조립성 및 Burr 개선 가이드 추가	S.H.KIM		2022.03.10.

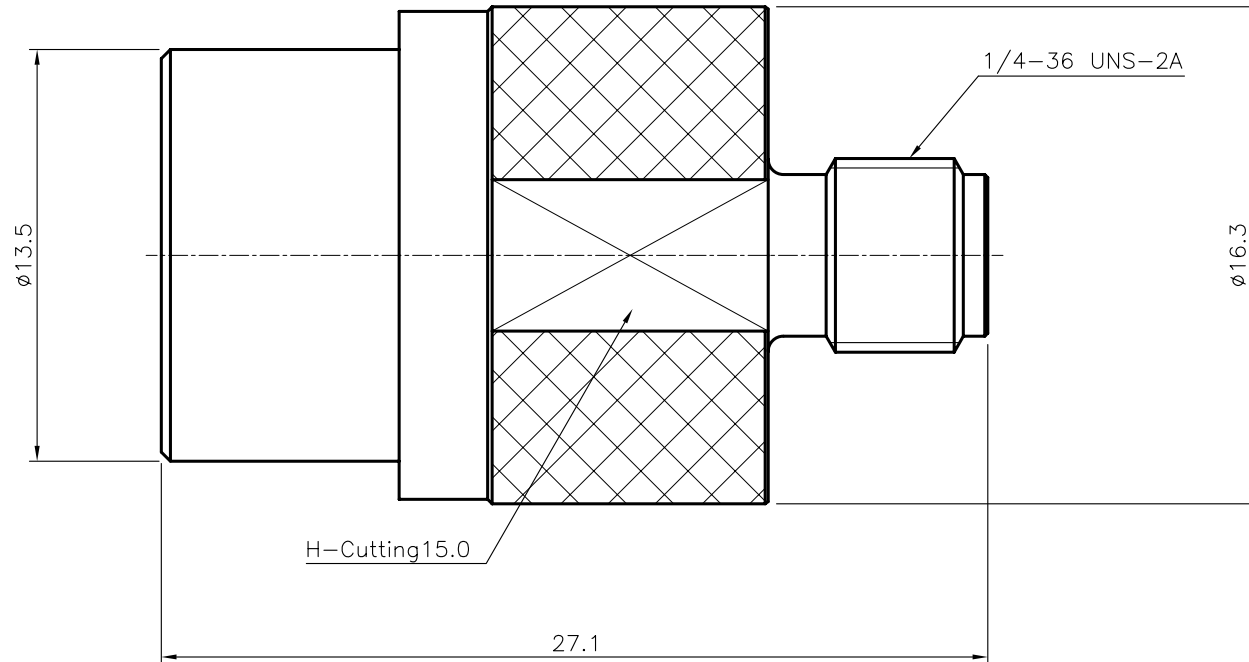

4	CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU02316-5/1
3	INSULATOR	1	TEFLON		DAI00106-N/1
2	CONTACT	1	BeCu C17300	Gold Plate	DAC00196-5/3
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DAD00412-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2022. 03. 10.			 KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	±0.3	APPROVED BY			
	Angle	CHECKED BY			
MATERIAL	±1°	DRAWN BY I.C.KIM			TITLE N50 (J) PUSH ON to SMA50(3.5mm) (J) ST

FINISH	_____	SCALE 4/1	UNIT mm		DWG NO. AD00702-7/1
					REVISION 1 SHEET 1 of 1