


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2021.02.18.

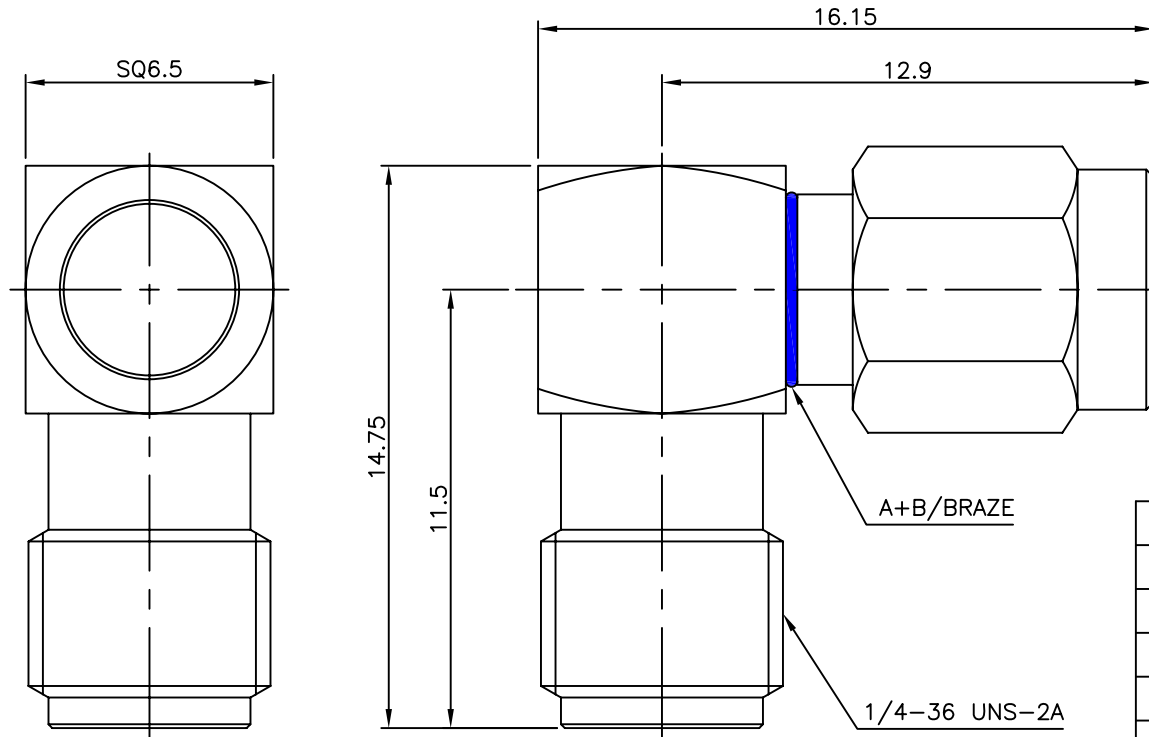

ELECTRICAL DATA

1	Frequency range	DC ~ 3.0 GHz
2	IMPEDANCE	50Ω NOMINAL
3	V.S.W.R	1.2 : 1 max
4	Insertion Loss	-0.2dB min

9	COVER	1	MBsBD C3604BD-F	Gold Plate	DCO00021-5/1
8	GASKET	1	SILICONE	RED	DGK00003-N/2
7	SPRING RING	1	BeCu C17300	Gold Plate	DSR00003-5/1
6	CAP	1	MBsBD C3604BD-F	Gold Plate	DCU00137-5/3
5	INSULATOR	1	TEFLON		DIN03195-N/1
4	INSULATOR	1	TEFLON		DIN03130-N/1
3	CONTACT	1			DCT04189-5/1
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT04188-5/1
1	1-2 BODY (B)	1	MBsBD C3604BD-F	Gold Plate	DBD00511-5/1
	1-1 BODY (A)	1	MBsBD C3604BD-F		DBD04695-1/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2021. 02. 18.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	Angle	APPROVED BY	I.C.KIM				
	±0.2						
MATERIAL	±1°	CHECKED BY	TITLE SMA50 (J) SSMA50 (P) RA ADAPTOR				

FINISH	_____	DRAWN BY	A4 DWG NO. AD00710-7/1				
	_____	S.Y.EUN					
		SCALE 5/1	UNIT mm			REVISION I R	SHEET 1 of 1