
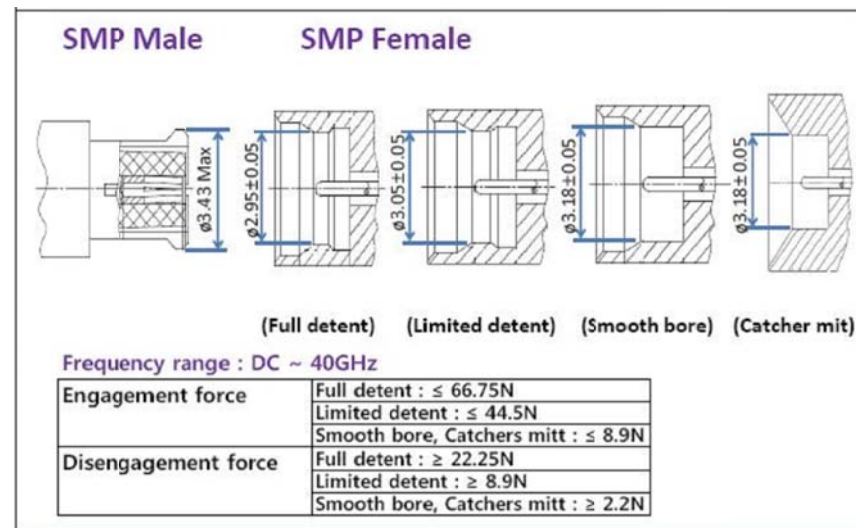


* ELECTRICAL SPECIFICATIONS

1. Impedance : 50Ω
2. Frequency Range : 950~1400MHz (L-Band)
3. V.S.W.R (MAX) : 1.2

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2021.03.24.

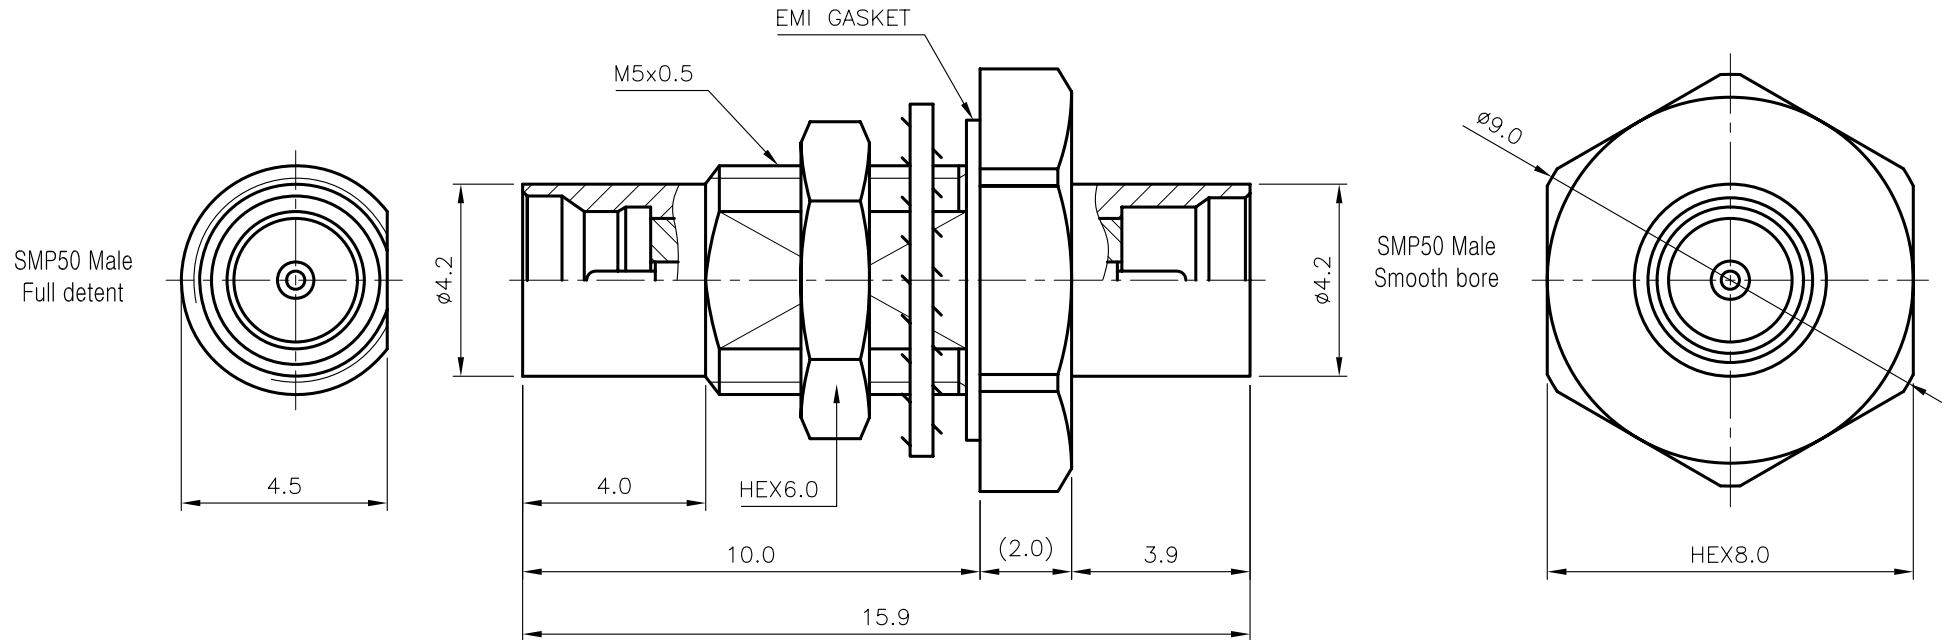

6	EMI GASKET	1	Carbon	BLACK	DGK00354-N/1
5	WASHER	1	MBsBD C3604BD-F	Gold Plate	DWA00008-5/1
4	NUT	1	MBsBD C3604BD-F	Gold Plate	DNT00002-5/1
3	INSULATOR	2	TEFLON		DIN03202-N/1
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DAC03367-5/1
1	BODY	1	MBsBD C3604BD-F	Gold Plate	DAD00420-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE2021. 03. 24.			 KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	Angle	APPROVED BY	I.C.KIM				
	±1°	CHECKED BY					
MATERIAL	_____	DRAWN BY	S.Y.EUN		TITLE	SMP50 (P) SMP50 (P) BH ADAPTOR	
FINISH	_____	SCALE	UNIT		A4	DWG NO.	AD00715-7/1
		6/1	mm			REVISION	I R