




* ELECTRICAL SPECIFICATIONS

1. Frequency Range : 9~10GHz
2. Impedance : 50Ω
3. V.S.W.R (MAX) : 1.3
4. Insertion Loss (MIN) : -0.3dB

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.H.KIM		2022.03.28.

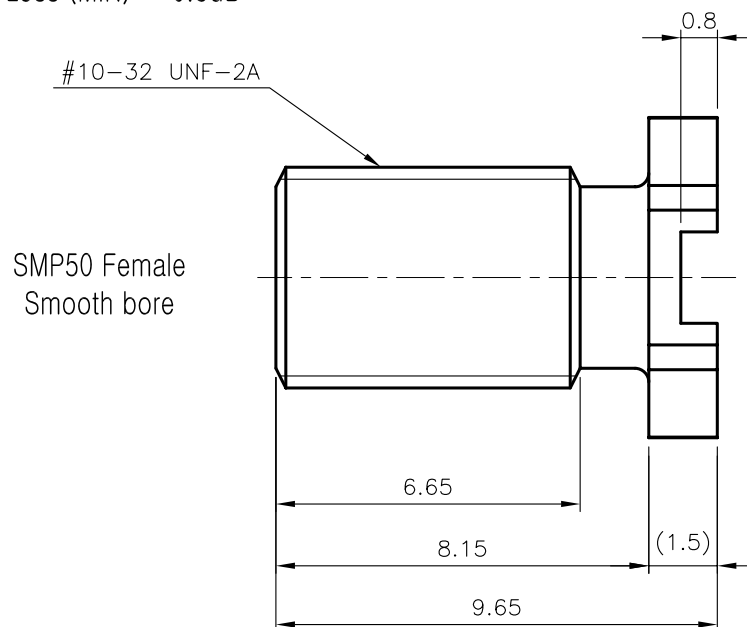

SMP50 Female
Smooth bore

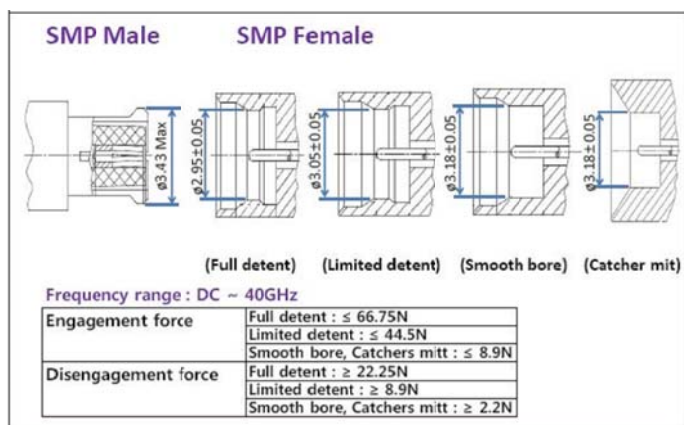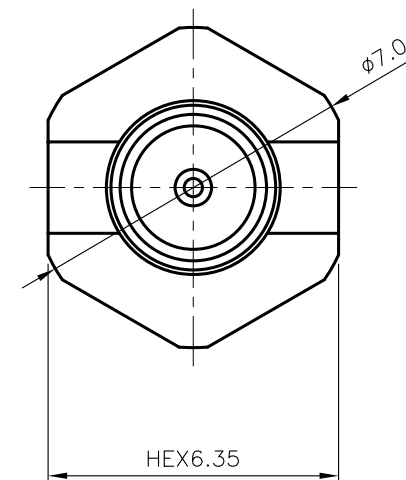

3	INSULATOR	1	TEFLON		DIN03288-N/1
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DAC03392-5/1
1	BODY	1	MBsBD C3604BD-F	Gold Plate	DAD00444-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2021. 03. 28.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY			
MATERIAL	_____	CHECKED BY			TITLE SMP50 (P) SMP50 (P) BH Smooth bore ADAPTOR
		DRAWN BY S.H.KIM			
FINISH	_____	SCALE	UNIT		A4
		6/1	mm		
		REVISION			SHEET 1 of 1