


AD00738-7/1

AD00738-7/1

Frequency	
Insertion Loss	
VSWR	
Impedance	☒ 50Ω ☐ 75Ω
Temperature	-40°C ~ 125°C

**mm
S11/S22/S21
(SWR,SWR,dB)

☒ _0.5GHz -
☒ _1.0GHz -
☒ _1.5GHz -
☒ _2.0GHz -
☒ _3.0GHz -1.18, 1.20, 0.6
☒ _4.0GHz -
☒ _5.0GHz -
☒ _6.0GHz -1.62, 1.62, 0.62



MHF4 (J) SMA50 (P)
ST

BODY/Nickel PIN/Gold
HEX-CAP/SUS/PASIVATED

► NETWORK ANALYZER


► Test cable

► Test Adaptor

- ☐ E5071B (~8.5GHz)
- ☒ ZND (~8.5GHz)
- ☐ ZVA50 (~50GHz)

- ☒ N Male to SMA Male
10GHz Cable (CF00540-7/1)
- ☐ N Male to N Male
10GHz Cable (CF00539-7/1)
- ☐ 2.4mm Male to 2.4mm Male
50GHz Cable)

5/17/2022 4:37:08 AM
1328.5170K92-102503-Hn

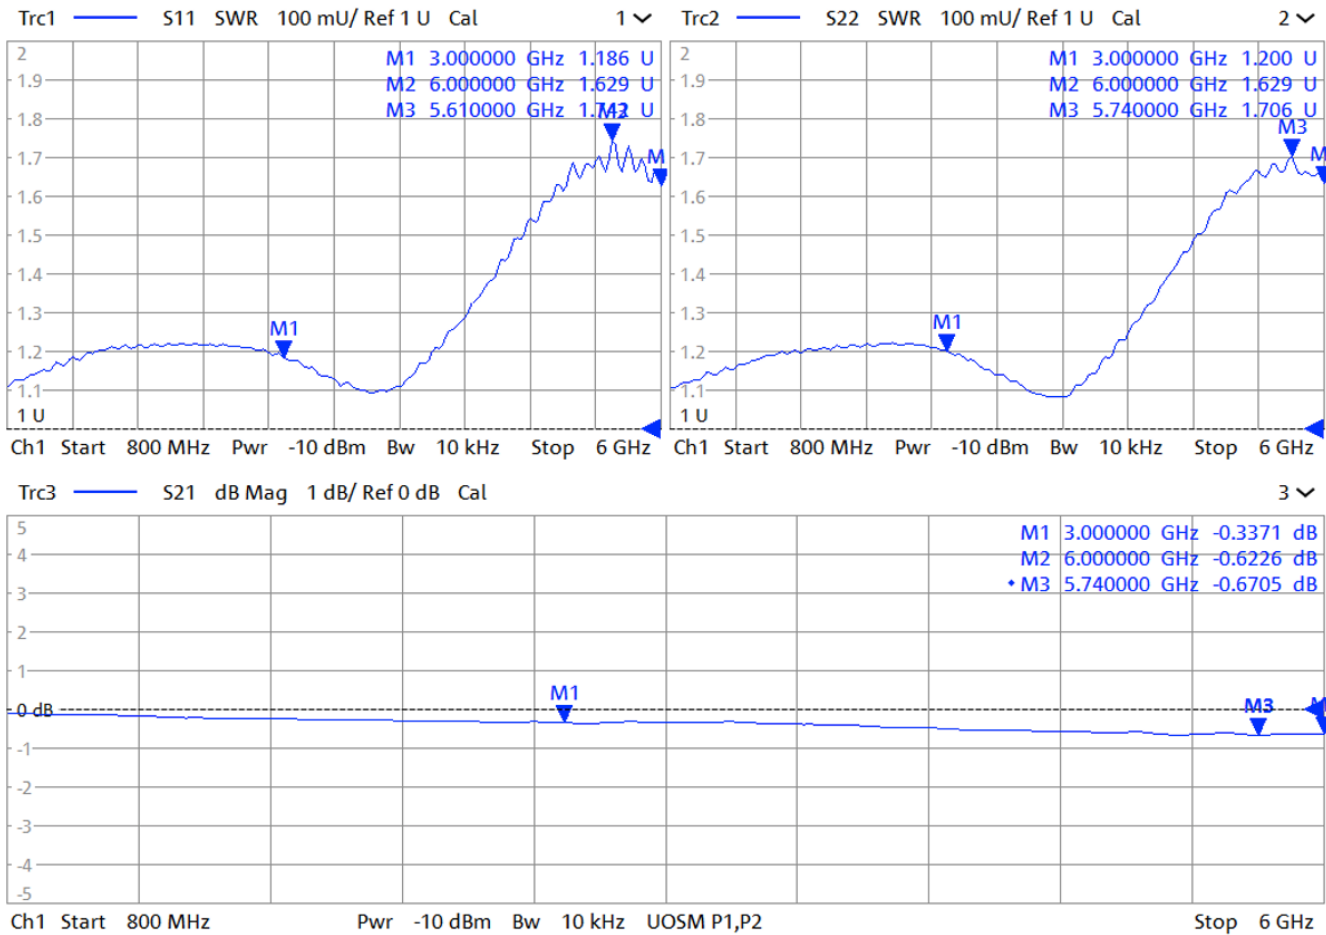

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)