


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.H.KIM		2022.06.30.
1	고객사 요청 CAP외경사이즈 변경 및 핀 길이 수정	S.H.KIM		2022.08.17.


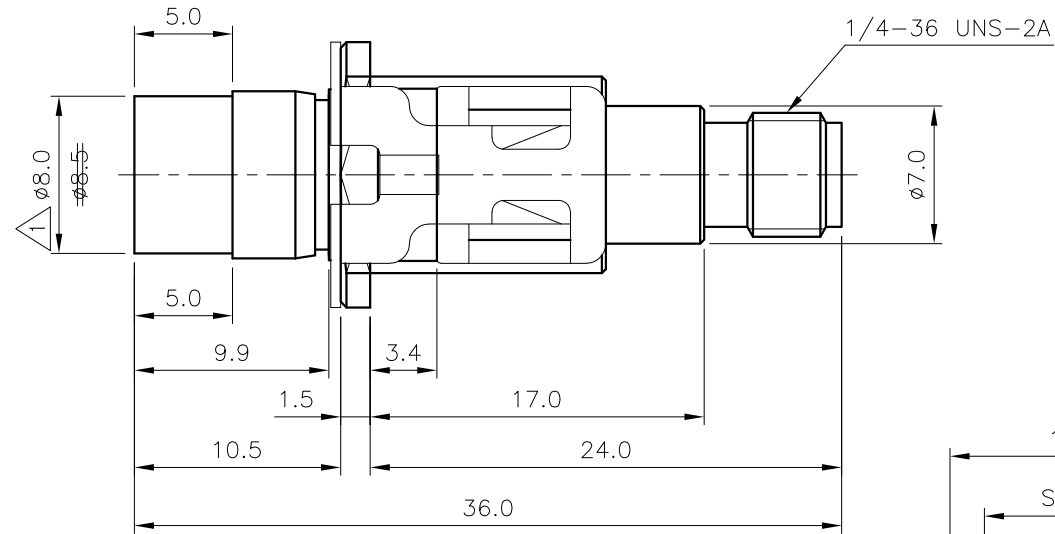


※내전압 검사 할 것(750V)


* PCB 두께 권장 사양 : 3.2t ±0.1mm

ELECTRICAL DATA


1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~6GHz
3. VSWR (Max) : 1.2
4. INSERTION LOSS : 0.3dB (Max)

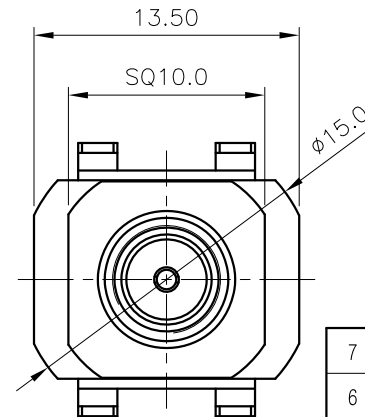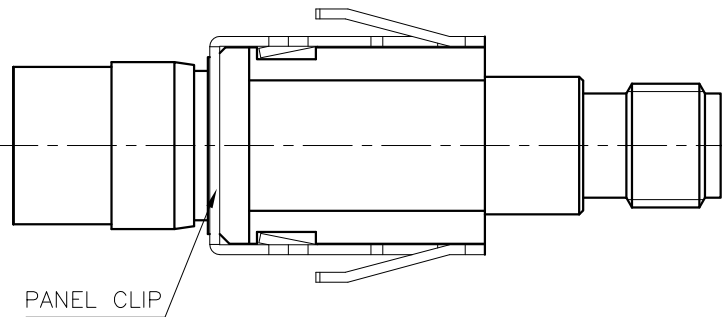

7	LOCK PANEL	1	Stainless steel (0.4~0.5t)		DSR00070-N/2
6	SPRING RING	1	BeCu C17300	Nickel Plate	DSR00007-5/1
5	CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU00018-5/2 DCU00018-5/1
4	INSULATOR	1	TEFLON		DIN01973-N/1
3	INSULATOR	1	TEFLON		DIN00190-N/1
2	CONTACT	1	BeCu C17300	Gold Plate	DAC03401-5/2 DAC03401-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DAD00453-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE



- * 포장사양
- P-T21(5)-P2-B1000
 - 1. 21구 트레이 적용
 - 2. 1Hole당 제품 5ea 포장
 - 3. 1BOX=1000개 포장

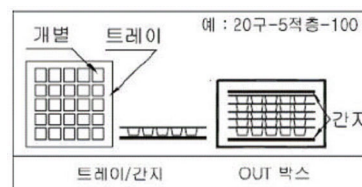

TOLERANCE	Decimal ±0.2	DATE 2022. 08. 17.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017			
	Angle ±1°	APPROVED BY					
MATERIAL _____	CHECKED BY			TITLE PDM50 (P) SMA50 (J) PANEL LOCK ADAPTOR			
	DRAWN BY	S.H.KIM					
FINISH _____	SCALE 2.5/1	UNIT mm		A4	DWG NO.	AD00740-7/1	
					REVISION	1	SHEET