


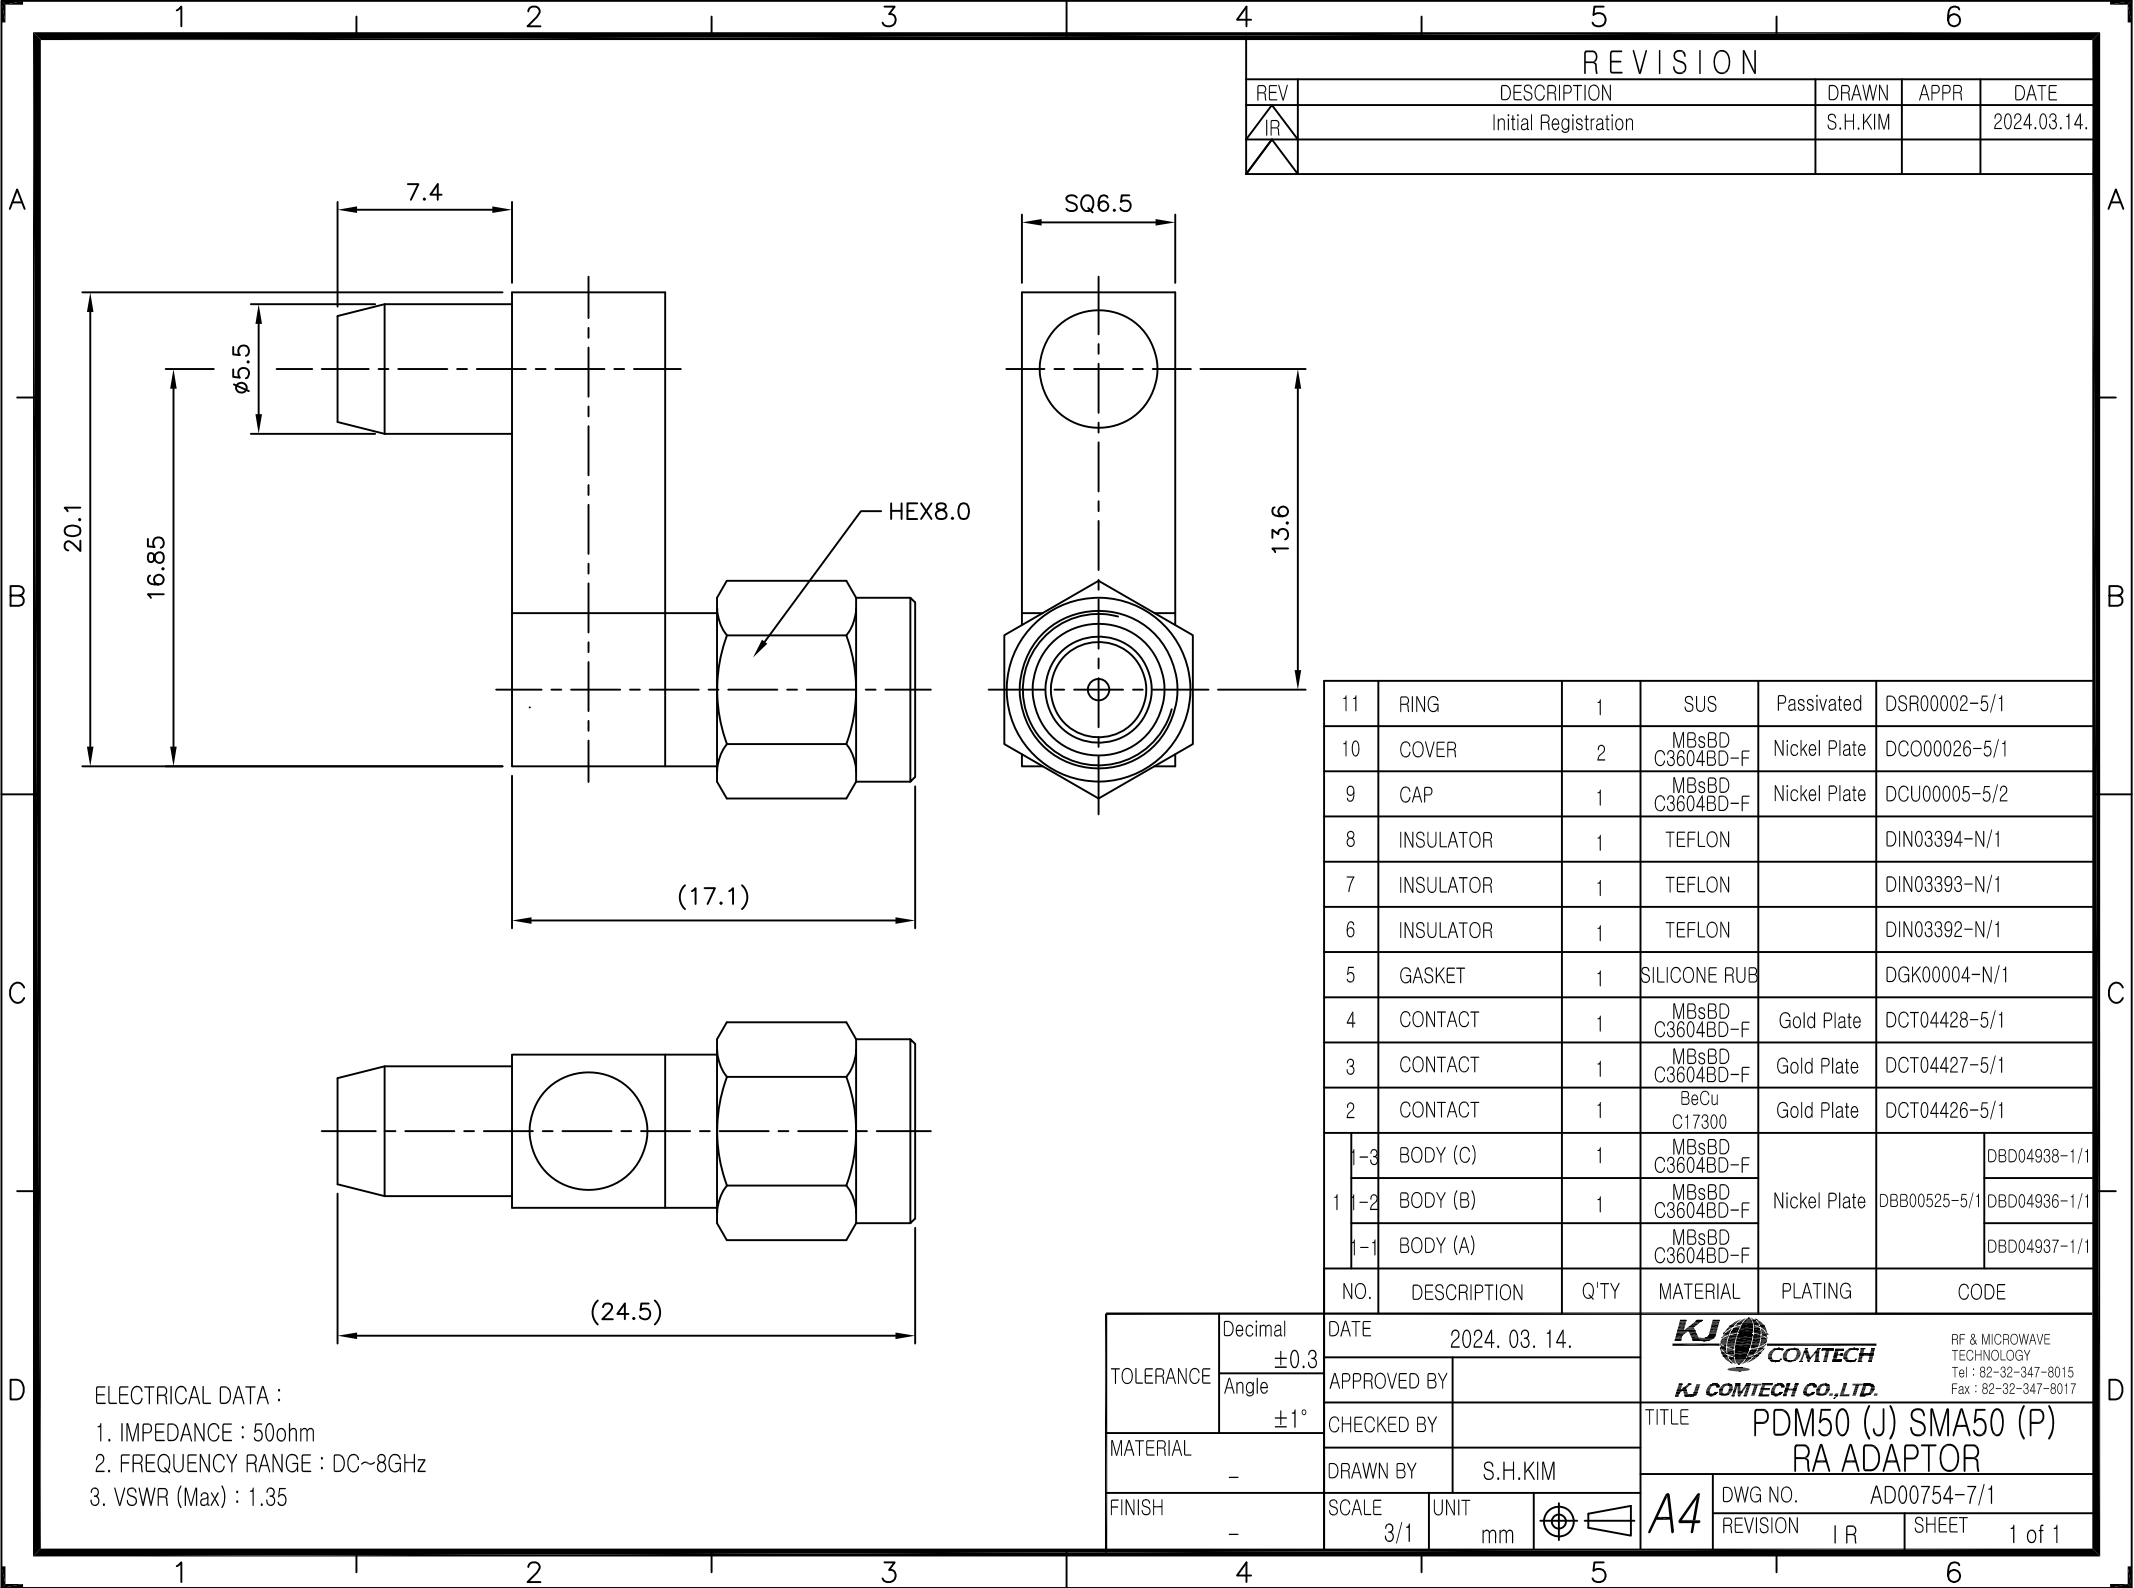

ELECTRICAL DATA :
1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~8GHz
3. VSWR (Max) : 1.35

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.H.KIM		2024.03.14.

11	RING	1	SUS	Passivated	DSR00002-5/1
10	COVER	2	MBsBD C3604BD-F	Nickel Plate	DCO00026-5/1
9	CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU00005-5/2
8	INSULATOR	1	TEFLON		DIN03394-N/1
7	INSULATOR	1	TEFLON		DIN03393-N/1
6	INSULATOR	1	TEFLON		DIN03392-N/1
5	GASKET	1	SILICONE RUB		DGK00004-N/1
4	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT04428-5/1
3	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT04427-5/1
2	CONTACT	1	BeCu C17300	Gold Plate	DCT04426-5/1
1-3	BODY (C)	1	MBsBD C3604BD-F	Nickel Plate	DBD04938-1/1
1-2	BODY (B)	1	MBsBD C3604BD-F		DBD04936-1/1
1-1	BODY (A)		MBsBD C3604BD-F		DBD04937-1/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.3	DATE 2024. 03. 14.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY			
MATERIAL -		CHECKED BY	TITLE PDM50 (J) SMA50 (P) RA ADAPTOR		
FINISH -		DRAWN BY S.H.KIM			
		SCALE 3/1	UNIT mm	A4	DWG NO. AD00754-7/1
					REVISION I R