
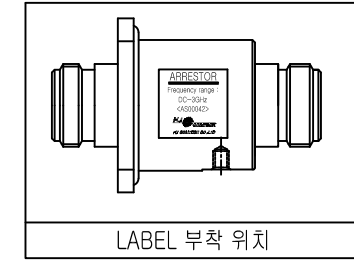


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.H.KIM		2022.06.13.

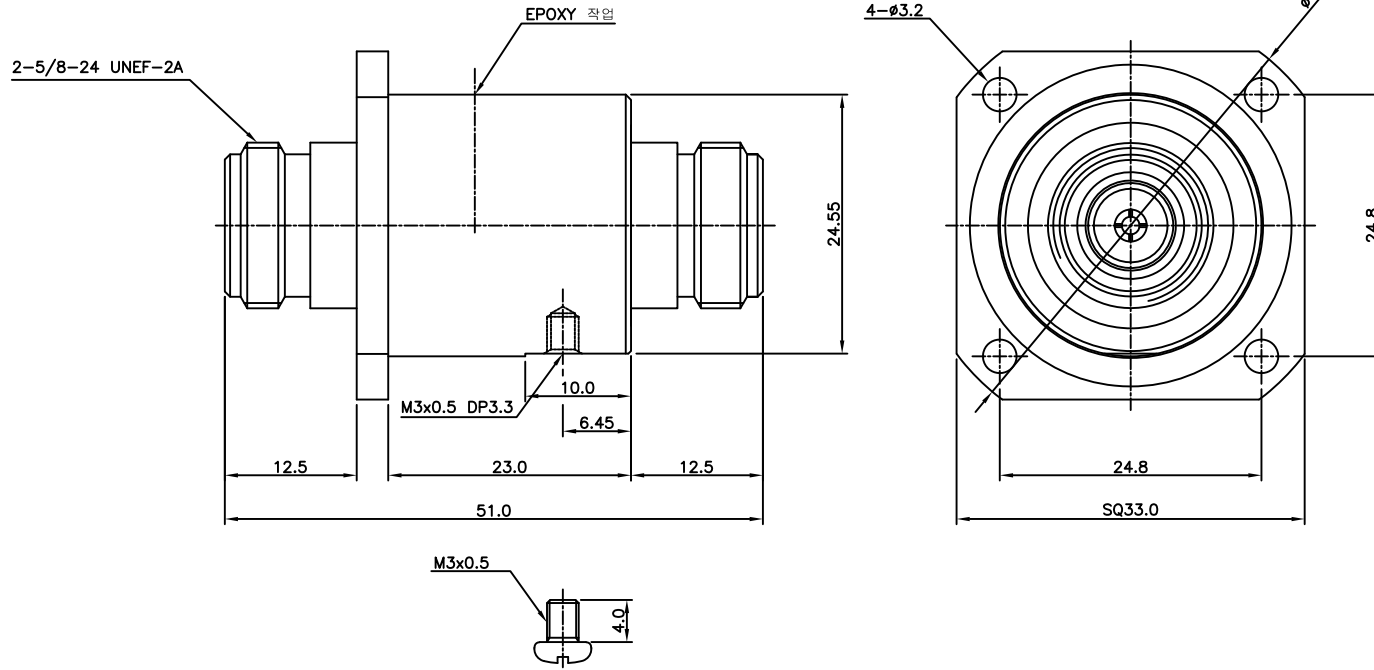

13	EPOXY (경화제519)	1	—	—	CAD00021-N/2 (경화제_519)
12	EPOXY (주제519)	1	—	—	CAD00021-N/1(주제_519)
11	BOLT (M3x4mm)	1	—	—	DBT00278-N/1
10	LABEL	1	은무대드롬		DLA00843-8/1
9	COVER	1	MBsBD C3604BD-F	Nickel Plate	DCS00063-5/1
8	GAS TUBE	1	—	—	DGT00021-N/1
7	INSULATOR	2	TEFLON		DIN03240-N/1
6	GASKET	1	SILICONE RUB	RED	DGK00042-N/2
5	GASKET	1	SILICONE RUB	RED	DGK00146-N/1
4	CONTACT	2	BeCu C17300	Gold Plate	DCT00693-5/2
3	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT04245-5/1
2	BODY(B)	1	MBsBD C3604BD-F	Nickel Plate	DBD04769-5/1
1	BODY(A)	1	MBsBD C3604BD-F	Nickel Plate	DBD04768-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

ELECTRICAL SPECIFICATIONS

Frequency Range : DC~3GHz

Insertion Loss (Min.) : -0.3dB

V.S.W.R (Max.) : 1.25 @ DC~3GHz

Impedance : 50Ω

방수 : IP67

Impulse Discharge Voltage : 5kV(1.2/50μs) / 2.5kA (8/20μs)

DC Breakdown Voltage : 2500V ± 20%

Operating Temperature Range : -30.0℃ ~ +85.0℃

TOLERANCE	Decimal	DATE	2022. 06. 13.	 RF & MICROWAVE TECHNOLOGY KJ COMTECH CO., LTD. Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY		
MATERIAL	±1°	CHECKED BY		TITLE
		DRAWN BY	S.H.KIM	
FINISH		SCALE	2/1	ARRESTER NJ NJ 4H (Gas) 50ohm DWG NO. AS00042-7/3 REVISION I R SHEET 1 of 1
		UNIT	mm	