
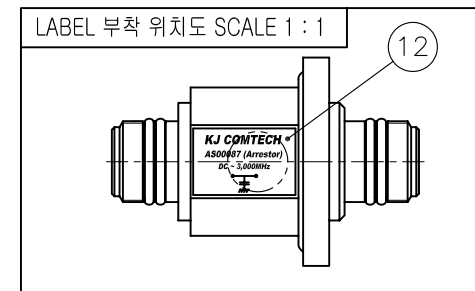


REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2009. 11. 04.

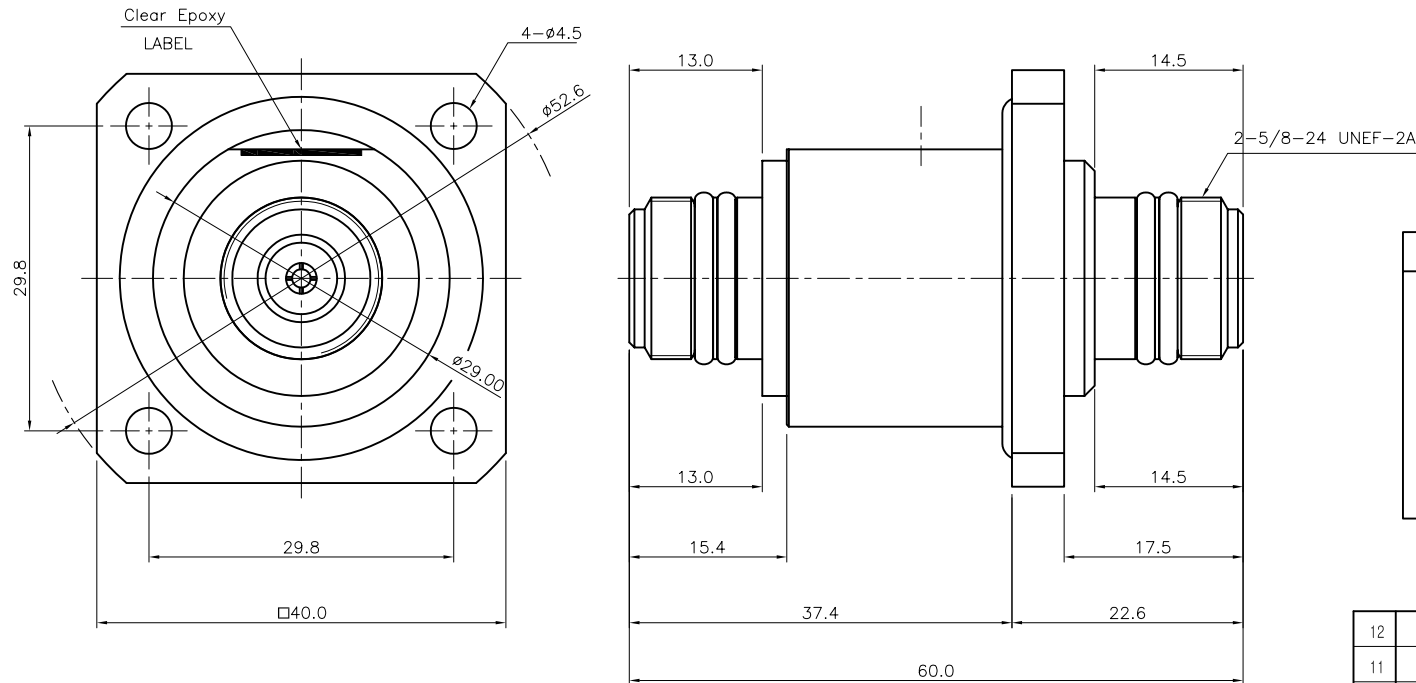

* 전기적 특성

1	Frequency Range	DC~3,000MHz
2	Impedance	50Ω (Nominal)
3	V.S.W.R (Max.)	1.15 : 1
4	Insertion Loss (Max.)	0.2dB
5	Surge Current	10kV(1.2/50μs) / 20kA (8/20μs)
6	DC Breakdown Voltage	2500V

12	LABEL	1	은색라벨		DLA00290-8/1
11	SPRING WASHER	1	BeCu	Silver Plate	DWA00086-5/1 (Q8037)
10	COVER	1	MBsBD	SUCO Plate	DCS00031-5/1
9	GAS TUBE	1	-	08-2500V	DGT00002-N/1 (XA706)
8	INSULATOR	2	TEFLON		DIN01091-N/1 (H8242)
7	GASKET(C)	1	SILICONE RUB	AN-216	DGK00059-N/1 (G5027)
6	GASKET(B)	1	SILICONE RUB	AN-017	DGK00048-N/1 (G6406)
5	GASKET(A)	4	SILICONE RUB	P-9	DGK00029-N/1 (G6406)
4	CONTACT	1	MBsBD	Silver Plate (7μm)	DCT02137-5/1
3	CONTACT	2	BeCu	Silver Plate (7μm)	DCT01872-5/1
2	BODY(B)	1	MBsBD	SUCO (3μm)	DBD02636-5/1
1	BODY(A)	1	MBsBD	SUCO (3μm)	DBD02635-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017				
	Angle	2009. 11. 04.					
MATERIAL	±0.1	APPROVED BY	 N(F)-N(F) GAS ARRESTOR DC~3GHz				
	±1°	J.H.YOUN					
FINISH	CHECKED BY	DWG NO. AS00087-7/1					
	I.C.KIM						
	DRAWN BY	REVISION I R SHEET 1 of 1					
	E.H.KIM						
	SCALE						
	2/1						
	UNIT						
	mm						