


REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2010.07.19.

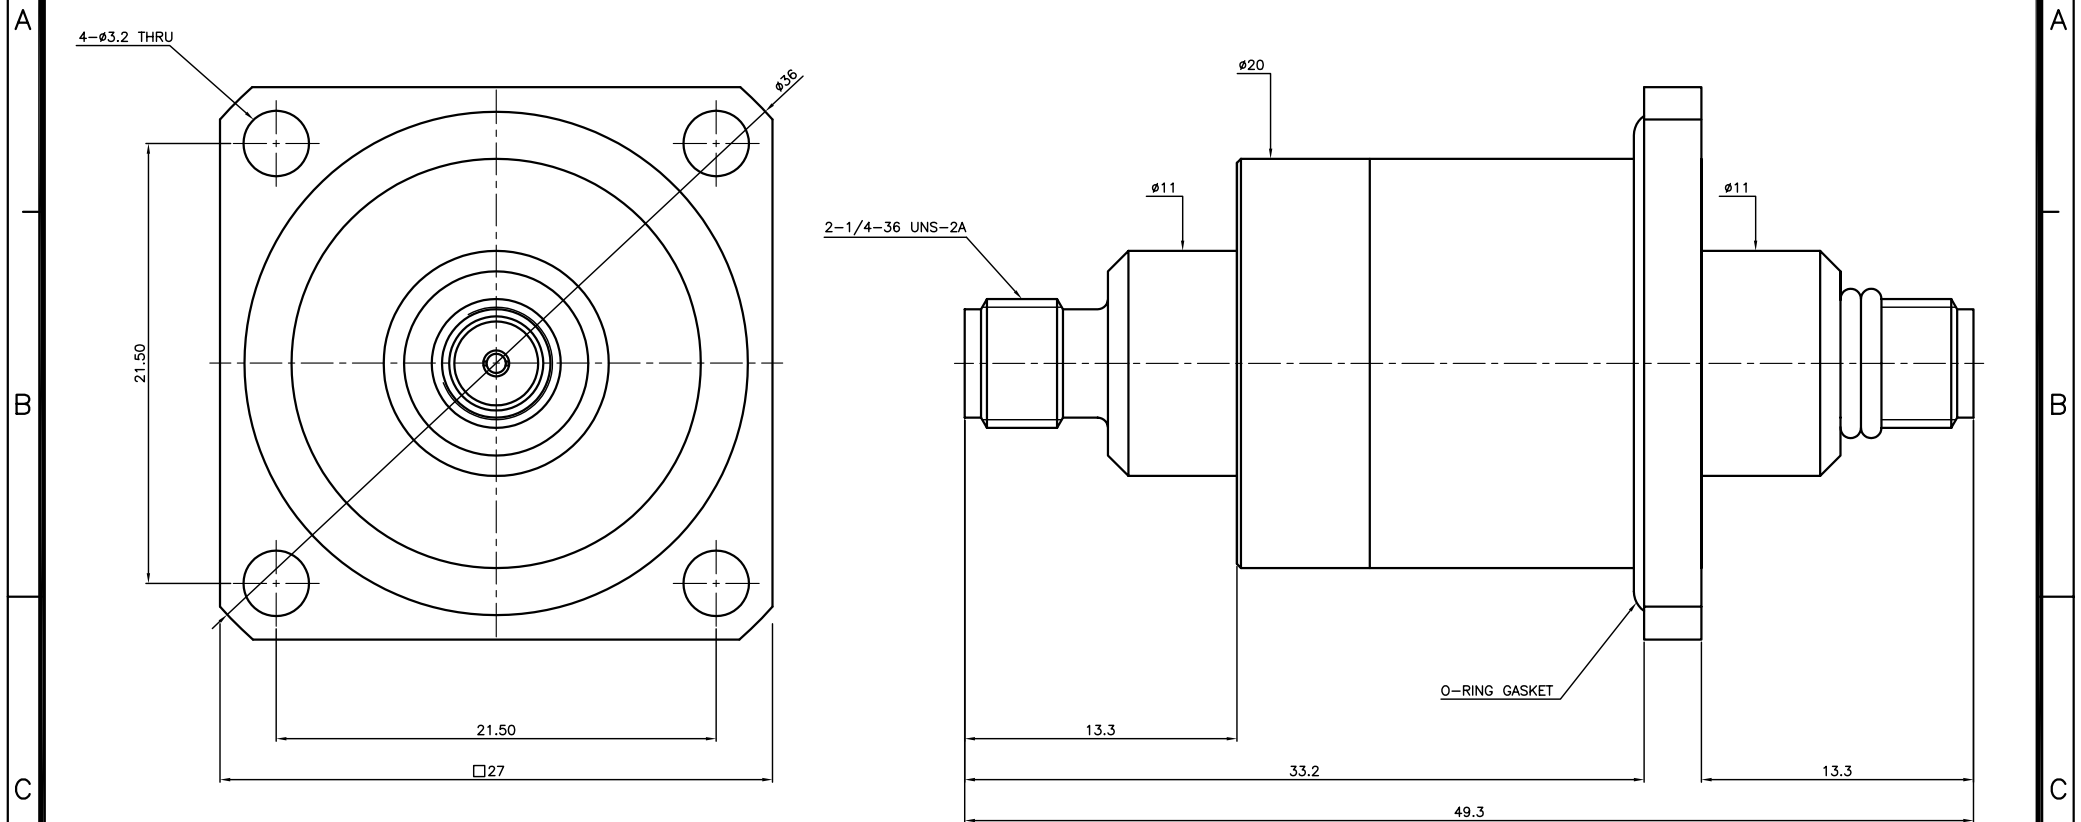


Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
2-1. SMA ARR ----> BODY : Nickel Plating
CONTACT : Gold Plating

* ELECTRICAL SPECIFICATIONS
Frequency Range : 2200~2700 MHz
Insertion Loss (Max.) : 0.5 dB
V.S.W.R (Max.) : 1.20 : 1
Power Handling (Max.) : 10W
Impedance : 50Ω
Surge Protection Capability
: 6kV(1.2/50μs) / 3kA (8/20μs)

LABEL 부착 외관도

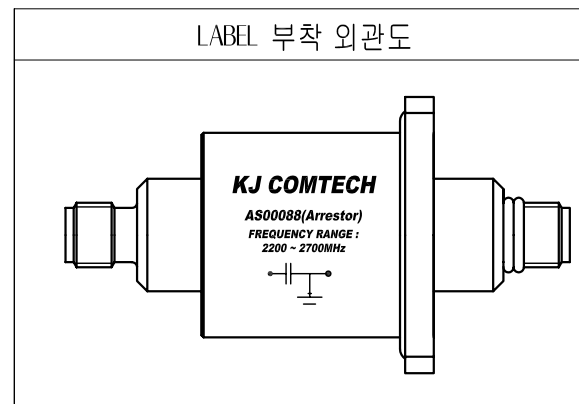

NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE
DATE	2010. 07. 19.				
APPROVED BY	Y.H.CHOI				
CHECKED BY					
DRAWN BY	I.C.KIM				
SCALE	4/1	UNIT	mm		
FINISH					
TOLERANCE	Decimal ±0.1 Angle ±1°				
MATERIAL					
FINISH					



RF & MICROWAVE
TECHNOLOGY
Tel : 82-32-347-8015
Fax : 82-32-347-8017

TITLE SMAJ SMAJ(1/4λ) ARRESTOR
2200~2700MHz

DWG NO. AS00088-7/3
REVISION I R SHEET 1 of 1