



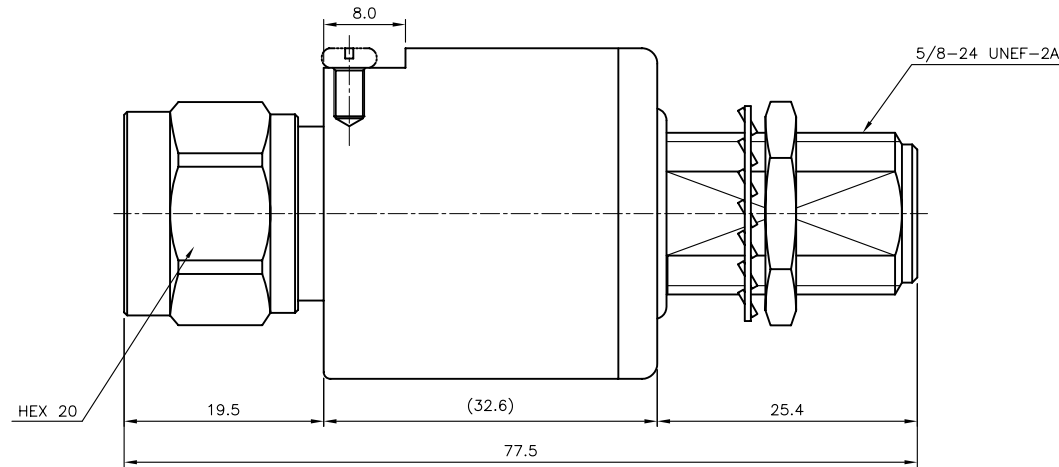


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM	Y.H.CHOI	2011.01.03.

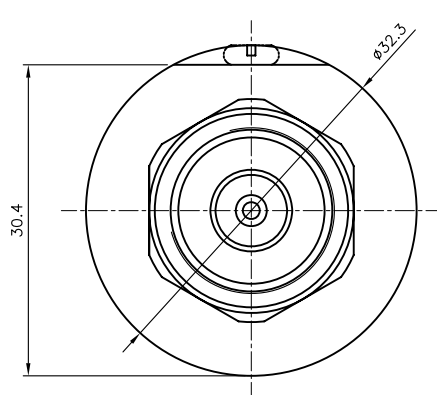

18	LABEL	1	은무대드론	—	DLA00386-8/1
17	BOLT	1	SUS (M3x0.5-5)	부동태 처리	DBT00279-N/1
16	SHRINK TUBE	1	Ø4-18 Yellow	KEHS-225	ATU00251-N/2
15	WASHER	1	BsS	Nickel Plate	DWA00045-5/1
14	NUT	1	MBsBD	Nickel Plate	DNT00033-5/1
13	SPRING RING	1	PBR	Nickel Plate	DSR00020-5/1
12	INSERT	1	MBsBD	Nickel Plate	DIS00175-5/1
11	CAP	1	MBsBD	Nickel Plate	DCU00063-5/3
10	CIRCLE PLATE	1	A5052	Silver Plate	DCA00014-5/1
9	JOINT PIN	1	MBsBD	Gold Plate	DCT02382-5/1
8	INSULATOR	2	TEFLON	White	DIN01261-N/1
7	GASKET	1	Silicone Rub	Red	DGK00130-N/1
6	GASKET	1	NBR	Black	DGK00046-N/1
5	GASKET	1	Silicone Rub	Red	DGK00013-N/1
4	CONTACT(B)	1	MBsBD	Gold Plate	DCT02381-5/1
3	CONTACT(A)	1	BeCu	Gold Plate	DCT00693-5/2
2	BODY(B)	1	MBsBD	Nickel Plate	DBD02867-5/1
1	BODY(A)	1	MBsBD	Nickel Plate	DBD02866-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 430~806 MHz
 Impedance : 50Ω
 V.S.W.R (Max.) : 1.1 : 1
 Insertion Loss (Max.) : 0.2 dB

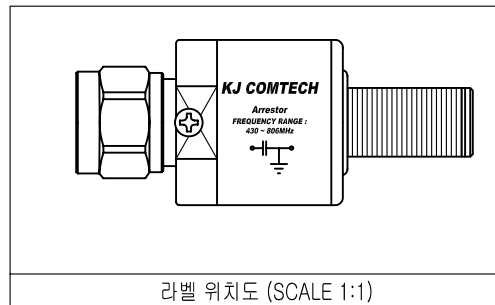

TOLERANCE	Decimal	DATE	2011. 01. 03.
	Angle	APPROVED BY	Y.H.CHOI
MATERIAL	±0.1	CHECKED BY	
	±1°	DRAWN BY	I.C.KIM
FINISH		SCALE	2/1
		UNIT	mm
		TITLE	ARRESTER(1/4λ) 50ohm S NP N/BJ
		DWG NO.	AS00101-7/1
		REVISION	IR SHEET 1 of 1

