


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1R	Initial Registration	I.C.KIM	J.H.YOUN	2011.11.22.

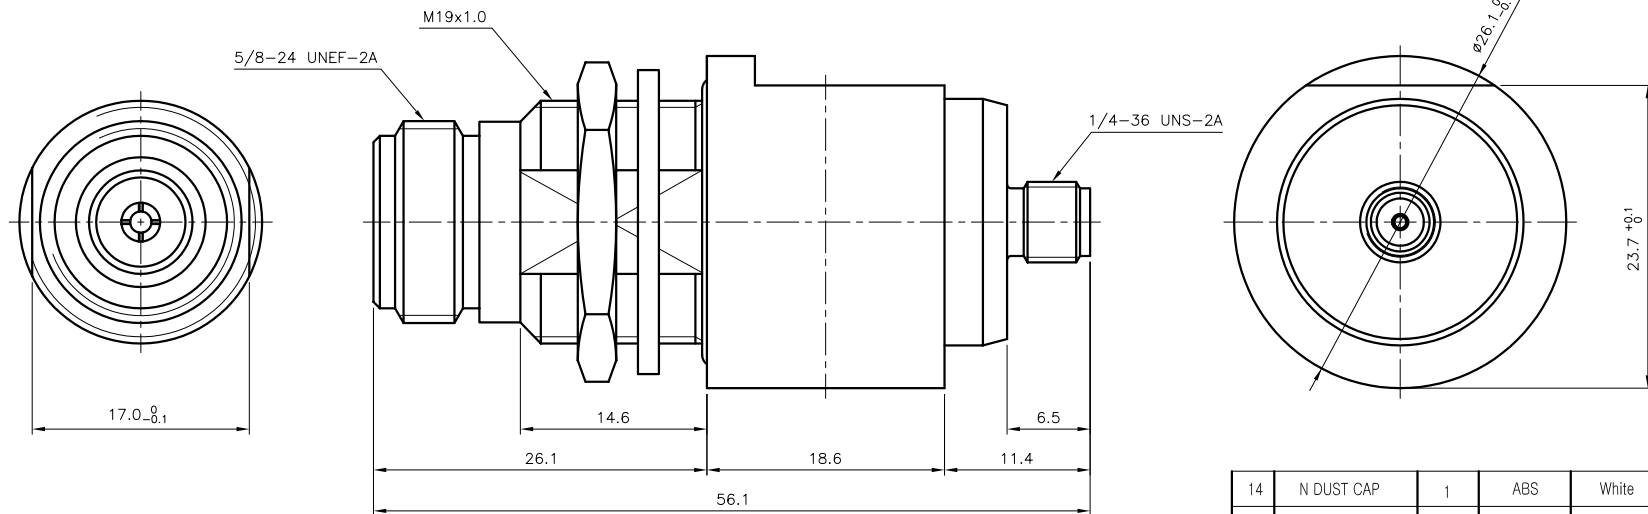

* Note

1.포장시 제품 DUST CAP 조립 할 것

- N DUST CAP - ABS (White)
- SMA DUST CAP - PVC (RED)

* ELECTRICAL SPECIFICATIONS


Frequency Range : DC ~ 4GHz

Insertion Loss (Min.) : 0.3dB

V.S.W.R (Max.) : 1.2 : 1

Impedance : 50Ω NOMINAL

Surge Current :
 6kV (1.2 x50μs)
 3kV (8 x20μs)

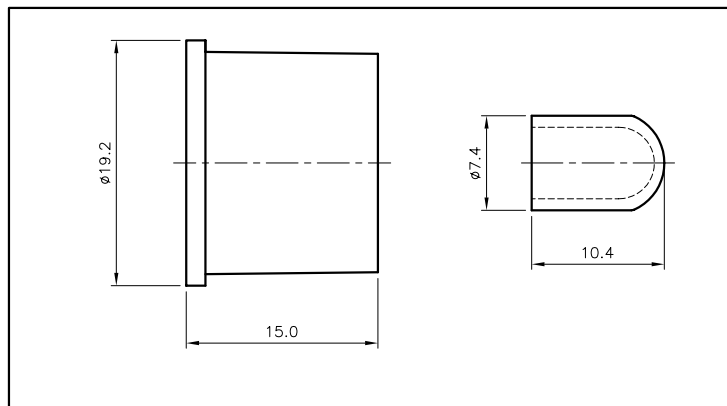

14	N DUST CAP	1	ABS	White	DGK00114-N/1
13	SMA DUST CAP	1	PVC	RED	DGK00069-N/1
12	WASHER	1	MBsBD	Nickel Plate	DWA00109-5/1
11	NUT	1	MBsBD	Nickel Plate	DNT00078-5/1
10	GAS TUBE	1	—	2P-23	DGT00001-N/1
9	COVER	1	MBsBD	Nickel Plate	DCS00053-5/1
8	INSULATOR	1	TEFLON	White	DIN01417-N/1
7	INSULATOR	1	TEFLON	White	DIN01843-N/1
6	GASEKT	1	NBR	Black	DGK00233-N/1
5	CONTACT(C)	1	MBsBD	Gold Plate	DCT02517-5/1
4	CONTACT(B)	1	BeCu	Gold Plate	DCT01759-5/2
3	CONTACT(A)	1	BeCu	Gold Plate	DCT01872-5/3
2	BODY(B)	1	MBsBD	Nickel Plate	DBD02984-5/1
1	BODY(A)	1	MBsBD	Nickel Plate	DBD02983-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE	2011. 11. 22.
	Angle	APPROVED BY	J.H.YOUN
MATERIAL	±0.1	CHECKED BY	
	±1°	DRAWN BY	I.C.KIM
FINISH	SCALE	UNIT	mm
	2.5/1		

		RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
KJ COMTECH CO., LTD.		TITLE NBJ SMAJ ARRESTER(Gas) 50ohm DC~4GHz	
DWG NO. AS00105-7/1		SHEET 1 of 1	