



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
△ IR	Initial Registration	S.H.KIM		2024.04.04.

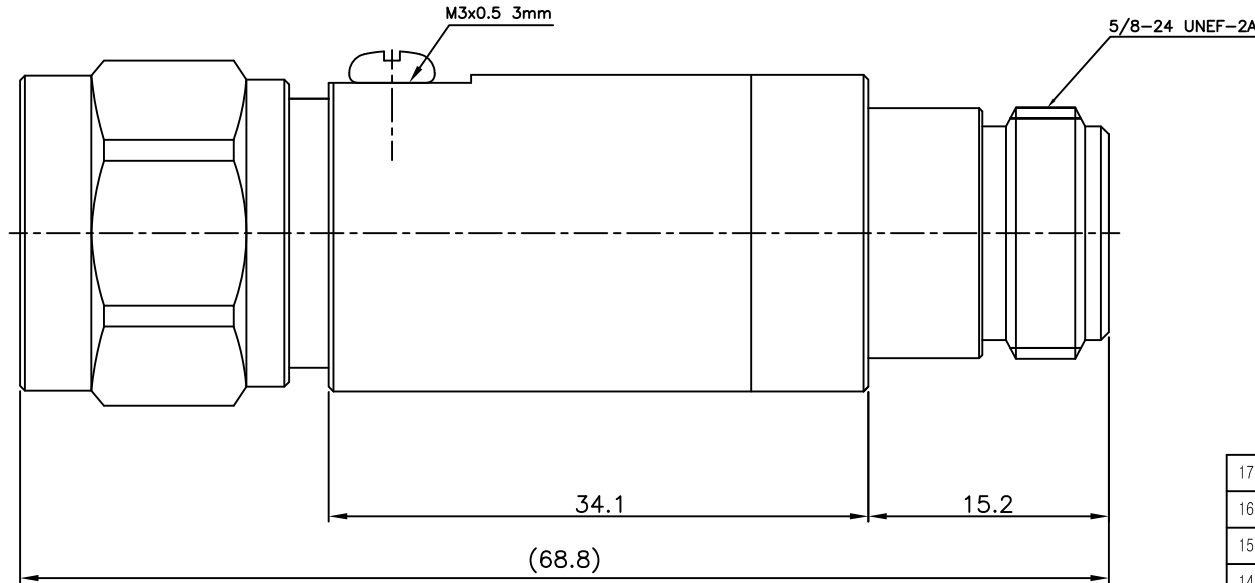

LABEL 부착 위치 (SCALE 1:1)

* ELECTRICAL SPECIFICATIONS
Frequency Range : 7,000~8,000MHz
Insertion Loss (Max.) : 0.3 dB
V.S.W.R (Max.) : 1.2 : 1
Impedance : 50Ω
Surge Protection Capability
: 10kV(1.2/50μs) / 5kA (8/20μs)

17	LABEL	1	은무데드볼트		DLA00886-8/1
16	동근머리 BOLT (M3 - 3mm)	1	SUS		DBT00277-N/1
15	PAD	2	절연테이프		DIT00011-N/1
14	CAP	1	MBsBD C3604BD-F	이원합금 (Ni/Tin)	DCU00063-5/6
13	RING	1	PBR	Nickel Plate	DSR00020-5/1
12	CIRCLE PLATE	1	A5052	Silver Plate	DCA00021-5/2
11	JOINT PIN (C)	1	MBsBD C3604BD-F	Gold Plate	DCT04423-5/1
10	JOINT PIN (B)	1	MBsBD C3604BD-F	Gold Plate	DCT02697-5/2
9	JOINT PIN (A)	1	MBsBD C3604BD-F	Gold Plate	DCT04422-5/1
8	INSULATOR	1	TEFLON		DIN00668-N/1
7	INSULATOR	1	TEFLON		DIN02004-N/1
6	GASKET	1	SILICONE RUB		DGK00179-N/1
5	GASKET	1	SILICONE RUB		DGK00013-N/1
4	CONTACT (B)	1	BeCu C17300	Gold Plate	DCT02696-5/1
3	CONTACT (A)	1	MBsBD C3604BD-F	Gold Plate	DCT04421-5/1
2	BODY(B)	1	MBsBD C3604BD-F	이원합금 (Ni/Tin)	DBD04933-5/1
1	BODY(A)	1	MBsBD C3604BD-F	이원합금 (Ni/Tin)	DBD04932-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.2	DATE 2024. 04. 04.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.		
	Angle ±1°	APPROVED BY				
MATERIAL		CHECKED BY		TITLE NP NJ(1/4λ) ARRESTOR 7000~8000 MHz		
		DRAWN BY	S.H.KIM			
FINISH		SCALE 3/1	UNIT mm		A3	DWG NO. AS00108-7/3
						REVISION I R