


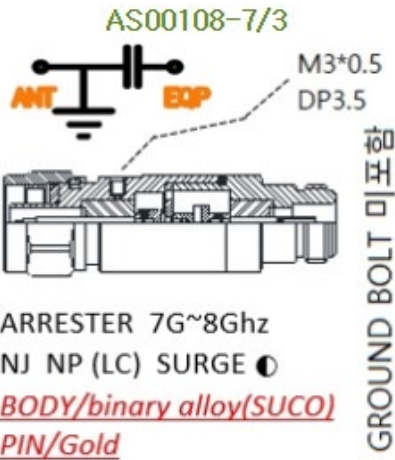

AS00108-7/3	
Impedance	☒ 50Ω ☐ 75Ω
Temperature	-40℃ ~ 125℃

VSWR ~8GHz/1.20:1
MAX ~8GHz/1.14:1
(LOSS ~8GHz/0.18dB)


▶ NETWORK ANALYZER

▶ Test cable

▶ Test Adaptor

- ☒ ZND (~8.5GHz)
☐ ZVA50 (~50GHz)
- ☒ N Male to SMA Male
10GHz Cable (CF00540-7/1)
☐ N Male to N Male
10GHz Cable (CF00539-7/1)
☐ 2.4mm Male to 2.4mm Male
50GHz Cable)

4/26/2024 12:36:58 AM
1328.5170K92-102503-Hn

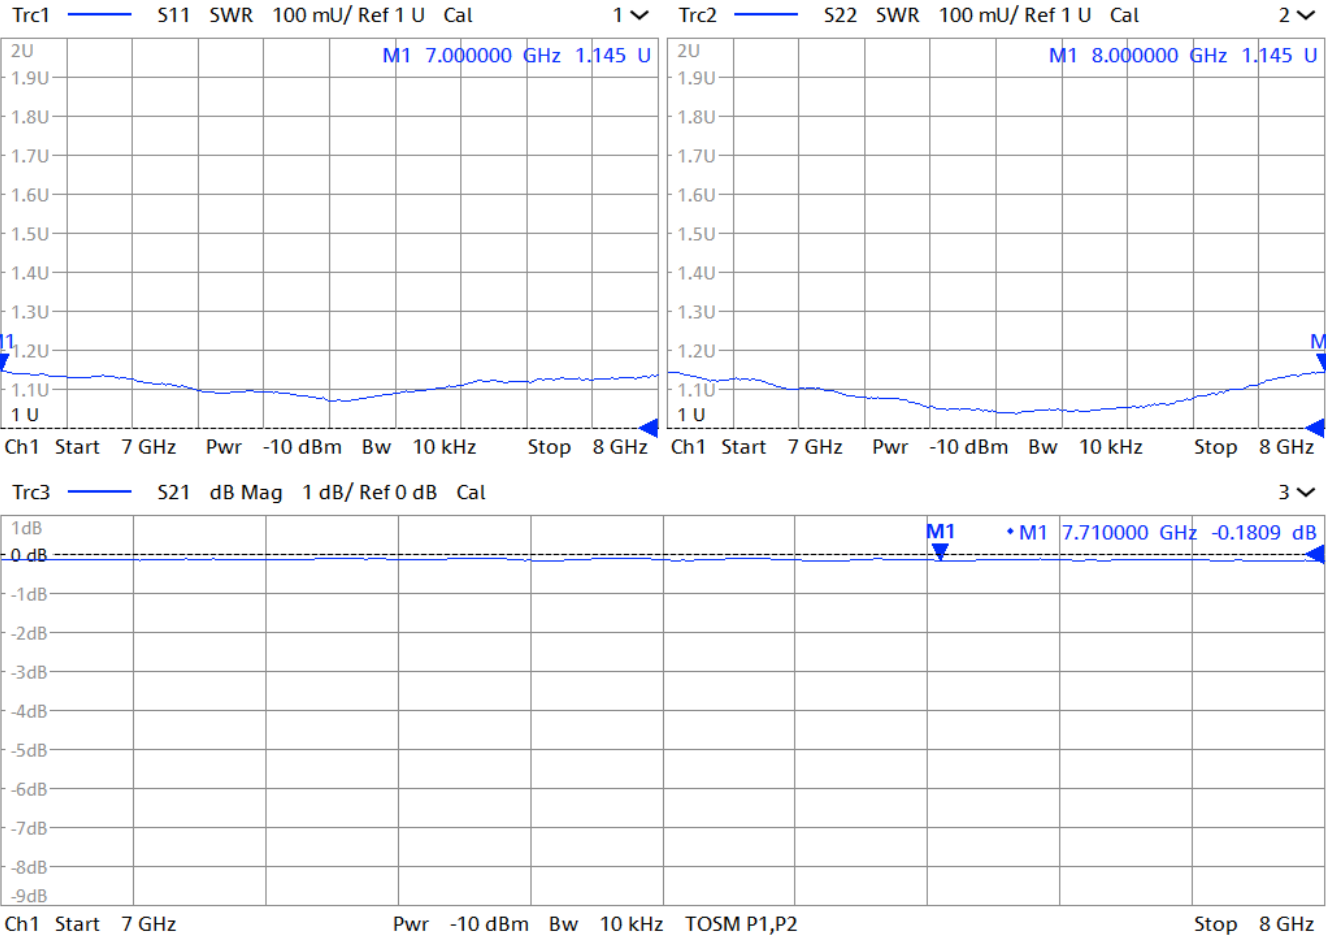

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)