
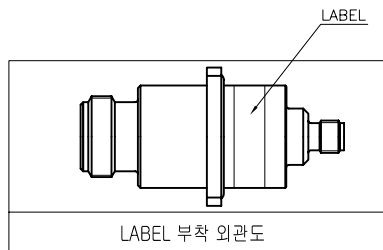
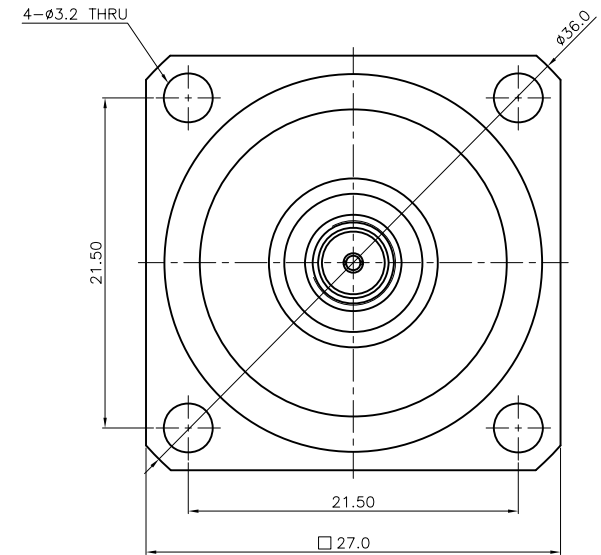


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM	J.H.YOUN	2012.05.25.

2012. 06. 04.
REV

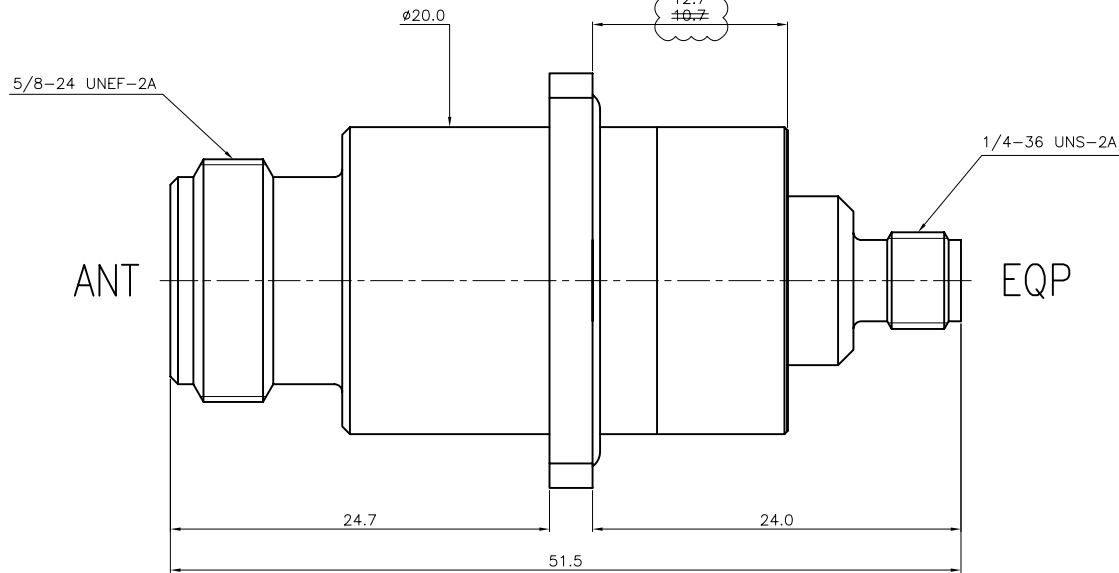

* ELECTRICAL SPECIFICATIONS
Frequency Range : 2000~3000 , 5000~6000MHz
Insertion Loss (Max.) : 0.5 dB
V.S.W.R (Max.) : 1.3 : 1
Impedance : 50Ω
Surge Protection Capability
: 6kV(1.2/50μs) / 3kA (8/20μs)

NO.		DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE
TOLERANCE	Decimal	DATE	2012. 05. 25.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	Angle	APPROVED BY	J.H.YOUN			
MATERIAL	±1°	CHECKED BY		TITLE NJ SMAJ(1/4λ) ARRESTOR 2000~3000 , 5000~6000 MHz		
		DRAWN BY	I.C.KIM			
FINISH	SCALE	UNIT	mm	DWG NO. AS00109-7/1 REVISION I R SHEET 1 of 1		
	3/1					