
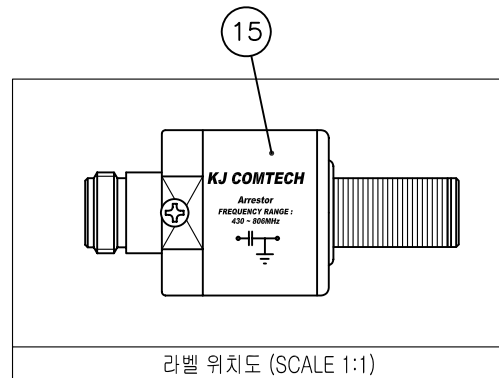

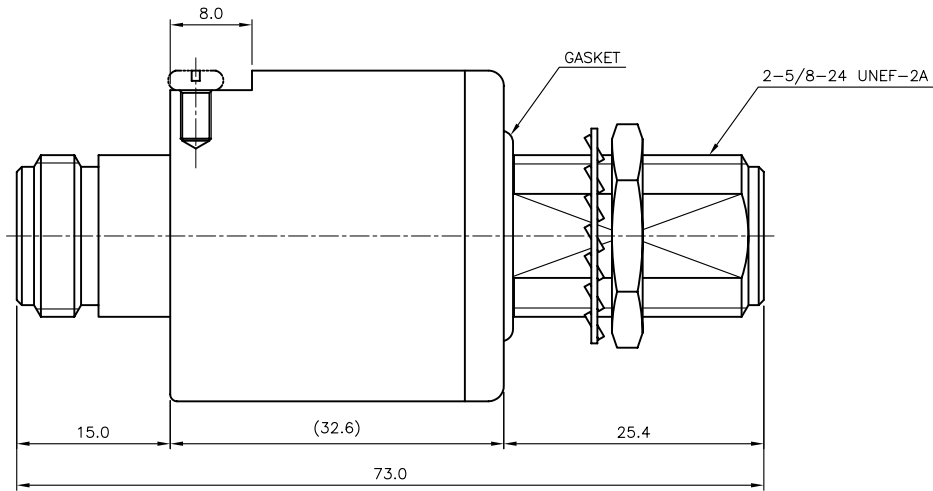


REVISION					
REV	DESCRIPTION	DRAWN	APPR	DATE	
1R	Initial Registration	I.C.KIM	Y.H.CHOI	2011.01.03.	

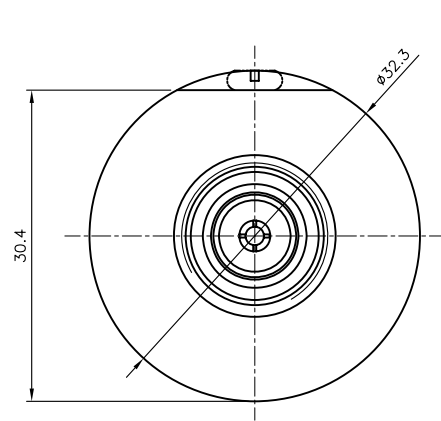

* ELECTRICAL SPECIFICATIONS
Frequency Range : 430~806 MHz
Impedance : 50Ω
V.S.W.R (Max.) : 1.2 : 1
Insertion Loss (Max.) : 0.2 dB

15	LABEL	1	은무대드론	—	DLA00386-8/1
14	BOLT	1	SUS (M3x0.5-5)	부동태 처리	DBT00279-N/1
13	SHRINK TUBE	1	Ø4-18 Yellow	KEHS-225	ATU00251-N/2
12	WASHER	1	BsS	Nickel Plate	DWA00045-5/1
11	NUT	1	MBsBD	Nickel Plate	DNT00033-5/1
10	INSERT	1	MBsBD	Nickel Plate	DIS00175-5/1
9	CIRCLE PLATE	1	A5052	Silver Plate	DCA00014-5/1
8	JOINT PIN	1	MBsBD	Gold Plate	DCT02382-5/1
7	INSULATOR	2	TEFLON	White	DIN01261-N/1
6	GASKET	1	Silicone Rub	Red	DGK00130-N/1
5	GASKET	1	NBR	Black	DGK00046-N/1
4	CONTACT(B)	1	MBsBD	Gold Plate	DCT02779-5/1
3	CONTACT(A)	2	BeCu	Gold Plate	DCT00693-5/2
2	BODY(B)	1	MBsBD	Nickel Plate	DBD03270-5/1
1	BODY(A)	1	MBsBD	Nickel Plate	DBD02866-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE	2013. 02. 28.
	Angle	APPROVED BY	I.C.KIM
MATERIAL	±0.1	CHECKED BY	
	±1°	DRAWN BY	E.H.KIM
FINISH		SCALE	2/1
		UNIT	mm

		RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
KJ COMTECH CO., LTD.		TITLE ARRESTER(1/4λ) 50ohm S N-BJ NJ	
A3		DWG NO. AS00119-7/1 REVISION I R SHEET 1 of 1	