
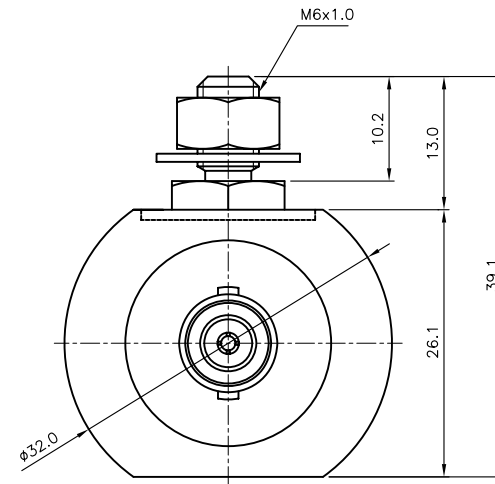


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	E.H.KIM	I.C.KIM	2013. 07. 18.

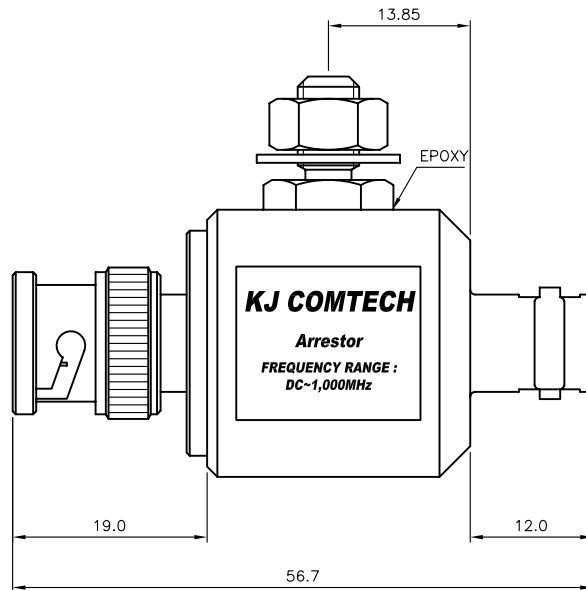

* ELECTRICAL SPECIFICATIONS

Frequency Range : DC~1,000 MHz

Impedance : 75Ω

V.S.W.R (Max.) : 1.2 : 1

Insertion Loss (Min.) : -0.2 dB

Type : Gas Capsule Type

DC Break down Voltage : 2500V ±20%

Surge Current : 6kV (1.2/50μs) / 3kA (8/20μs)

* CONNECTOR MATERIAL & FINISHES

BODY : MBsBD / Nickel Plating

CONTACT : BeCu, MBsBD /Gold Plating

		NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE
TOLERANCE	Decimal	DATE 2013. 07. 18.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	Angle	APPROVED BY I.C.KIM					
		CHECKED BY					
MATERIAL		DRAWN BY E.H.KIM			TITLE		
					ARRESTER(Gas) 75ohm BNC75 BNC75		
FINISH	SCALE		UNIT		A3	DWG NO. AS00121-7/1	
	2/1		mm			REVISION	I R