
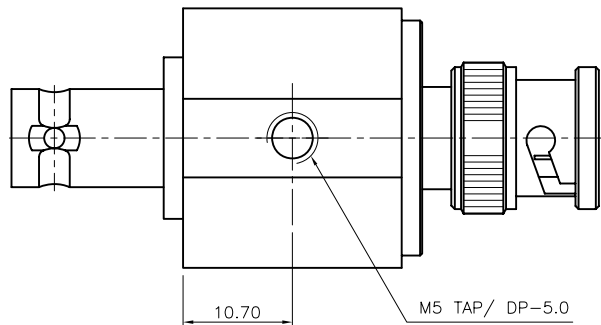
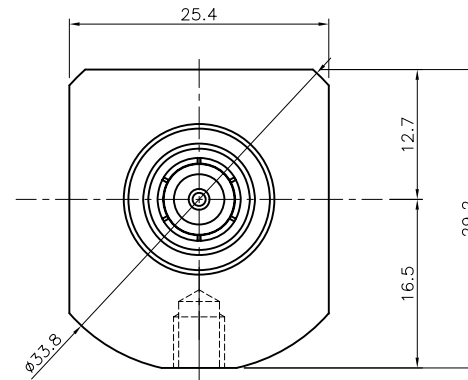
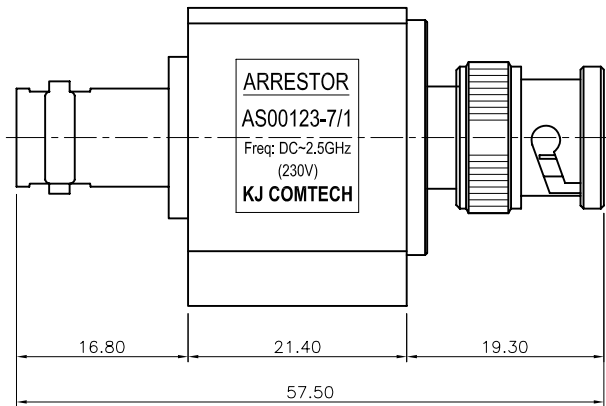
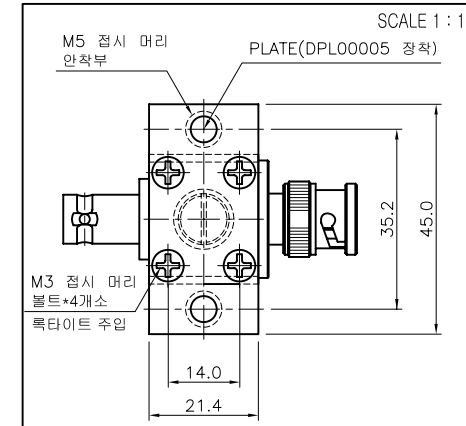



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1R	Initial Registration	E.H.KIM	I.C.KIM	2014. 03. 25.

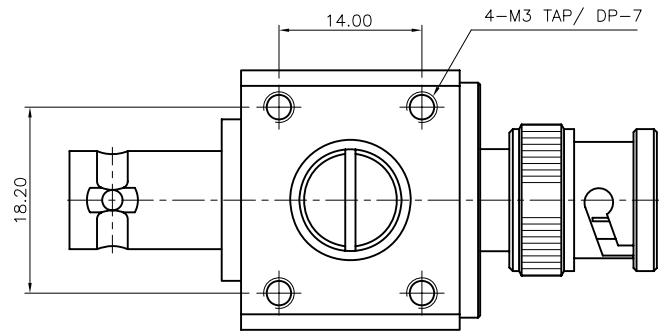

* ELECTRICAL SPECIFICATIONS
 Frequency Range : DC~2,500 MHz
 Insertion Loss(Max.) : 0.5dB
 V.S.W.R : 1.2:1
 Impedance : 50.0Ω
 DC Spark-over Voltage : 230V ±20%
 Impulse Discharge Current : 10kA (8/20us-10 times)
 Type : GAS TUBE
 Operating Temperature Range : -30.0℃ ~ +80.0℃

* MECHANICAL SPECIFICATIONS
 HOUSING : Brass (Nickel Plate)
 CONNECTORS PINS : Brass, Beryllium Copper(Gold Plate)
 INSULATORS : TEFLON
 PLTAE : A5052 (White Chromate)

NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE
DATE	2014. 03. 25.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
TOLERANCE	Decimal ±0.1 Angle ±1°	APPROVED BY I.C.KIM			
MATERIAL	CHECKED BY	DRAWN BY E.H.KIM	TITLE BNC(U)-BNC(P) ARRESTOR		
FINISH	SCALE 2/1	UNIT mm			
			A3	DWG NO. AS00123-7/1	
			REVISION I R	SHEET 1 of 1	