
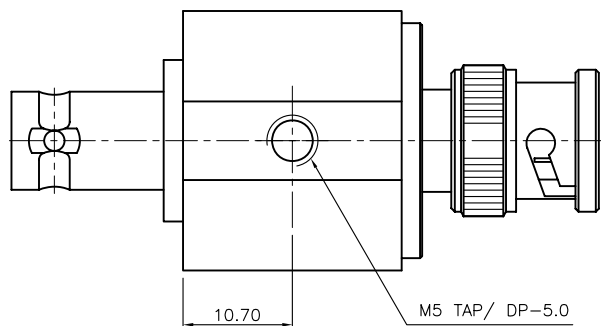
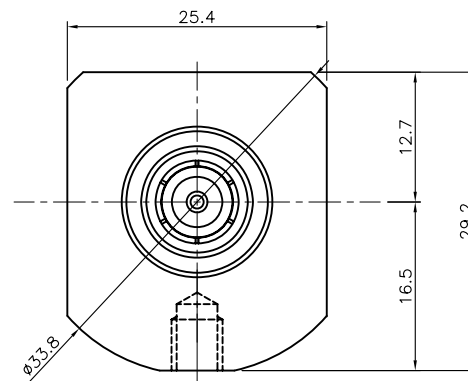
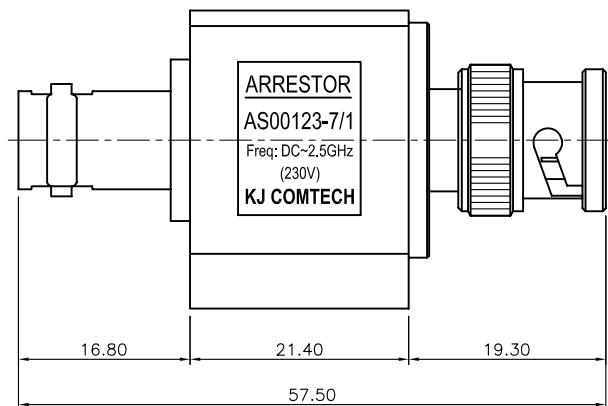
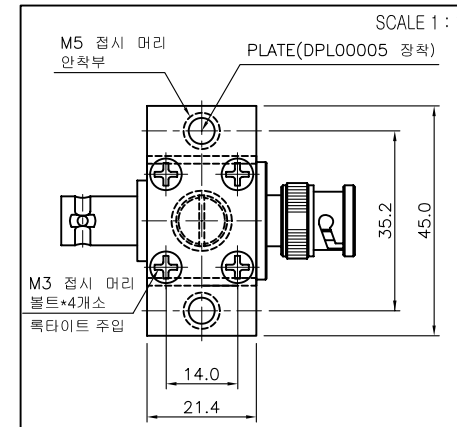



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1R	Initial Registration	E.H.KIM	I.C.KIM	2014. 03. 25.

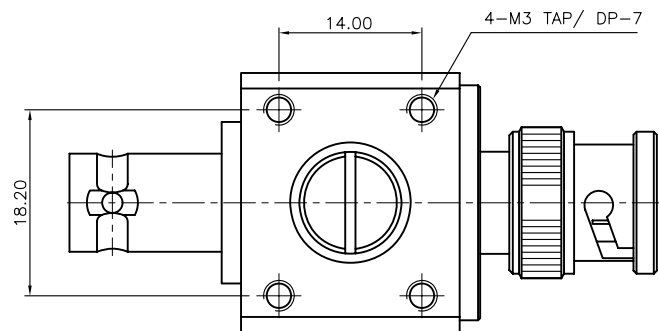

* ELECTRICAL SPECIFICATIONS

Frequency Range : DC~2,500 MHz

Insertion Loss(Max.) : 0.3dB

V.S.W.R : 1.2:1

Impedance : 50.0Ω

DC Spark-over Voltage : 90V ±20%

Impulse Discharge Current : 10kA (8/20us-10 times)

Type : GAS TUBE

Operating Temperature Range : -30.0℃ ~ +80.0℃

* MECHANICAL SPECIFICATIONS

HOUSING : Brass (Nickel Plate)

CONNECTORS PINS : Brass, Beryllium Copper(Gold Plate)

INSULATORS : TEFLON

PLTAE : A5052 (White Chromate)

NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE
DATE	2014. 03. 25.				
APPROVED BY	I.C.KIM				
CHECKED BY					
DRAWN BY	E.H.KIM				
SCALE	2/1	UNIT	mm		
TOLERANCE	Decimal ±0.1 Angle ±1°				
MATERIAL					
FINISH					
			TITLE		
			BNC(U)-BNC(P) ARRESTOR		
			DWG NO. AS00123-7/1		
			REVISION I R SHEET 1 of 1		



BNC(U)-BNC(P) ARRESTOR

DWG NO. AS00123-7/1

REVISION I R SHEET 1 of 1