


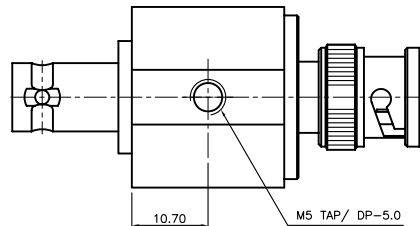
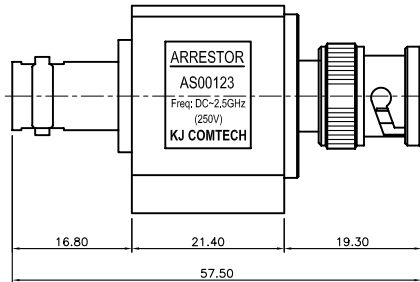


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	E.H.KIM	I.C.KIM	2014. 04. 24.

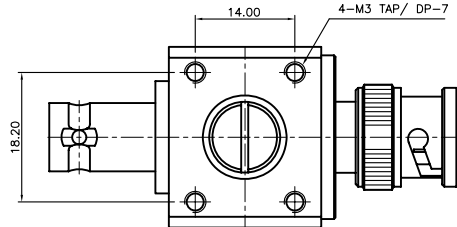

* ELECTRICAL SPECIFICATIONS

Frequency Range : DC~2,500 MHz
 Insertion Loss(Max.) : 0.3dB
 V.S.W.R : 1.2:1
 Impedance : 50.0Ω
 DC Spark-over Voltage : 250V ±15%
 Impulse Discharge Current : 5kA (8/20us)
 Type : GAS TUBE
 Operating Temperature Range : -30.0°C ~ +80.0°C

* MECHANICAL SPECIFICATIONS

HOUSING : Brass (Nickel Plate)
 CONNECTORS PINS : Brass, Beryllium Copper(Gold Plate)
 INSULATORS : TEFLON
 PLTAE : A5052 (White Chromate)

NO.	DESCRIPTION	QTY	MATERIAL	PLATING	CODE
DATE	2014. 04. 24.		 RF & MICROWAVE TECHNOLOGY TEL: 82-32-347-8110 FAX: 82-32-347-8017		
APPROVED BY	I.C.KIM				
CHECKED BY			TITLE BNC(J)-BNC(P) ARRESTOR		
DRAWN BY	E.H.KIM				
SCALE	2/1	UNIT	mm	 DWG NO. AS00123-773 REVISION 1 R SHEET 1 of 1	
FINISH					