
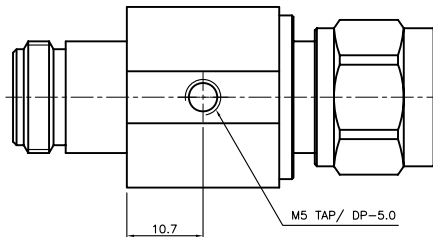


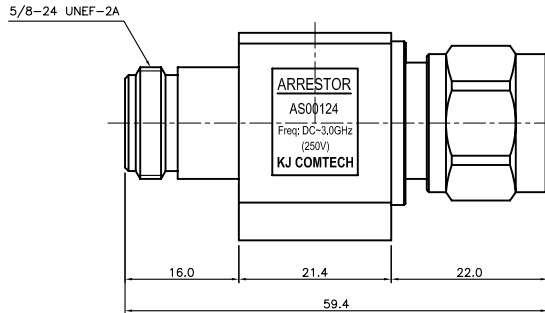


REVISION					
REV	DESCRIPTION	DRAWN	APPR	DATE	
1	Initial Registration	E.H.KIM	I.C.KIM	2014. 03. 25	

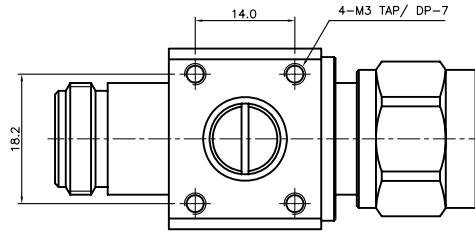

* ELECTRICAL SPECIFICATIONS

Frequency Range : DC~3,000 MHz
Insertion Loss(Max.) : 0.3dB
V.S.W.R : 1.2:1
Impedance : 50.0Ω
DC Spark-over Voltage : 250V ±15%
Impulse Discharge Current : 5kA (8/20us)
Type : GAS TUBE
Operating Temperature Range : -30.0℃ ~ +80.0℃

* MECHANICAL SPECIFICATIONS

HOUSING : Brass (Nickel Plate)
CONNECTORS PINS : Brass, Beryllium Copper(Gold Plate)
INSULATORS : TEFLON
PLTAE : A5052 (White Chromate)

NO.	DESCRIPTION	QTY	MATERIAL	PLATING	CODE
DATE	2014. 03. 25.		 RF & MICROWAVE TECHNOLOGY Tel: 82-32-347-8110 Fax: 82-32-347-8017		
APPROVED BY	I.C.KIM				
CHECKED BY			TITLE N(J)-N(P) ARRESTOR		
DRAWN BY	E.H.KIM				
SCALE	2/1	UNIT	mm	DWG NO. AS00124-7/1 REVISION 1/R SHEET 1 of 1	
FINISH					