



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2015.08.10.

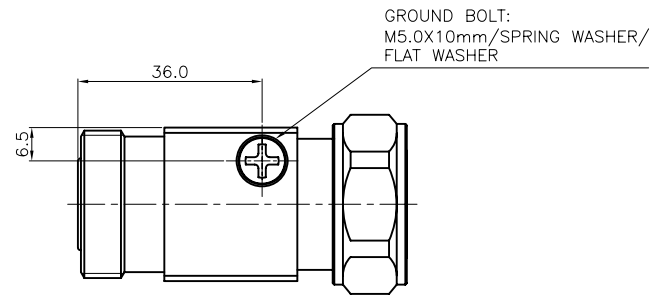

* ELECTRICAL SPECIFICATIONS
Frequency Range : 698~3600 MHz
Impedance : 50.0Ω
Insertion Loss(Max.) : -0.2dB
V.S.W.R(Max.) : 1.3:1
PIMD : -155.0dBc (@43dBm 2Tone)
RF Power : 500 W Peak, 250Watt Avg.
Surge Test : 6kA/3kA(1.2/50us,8/20us)

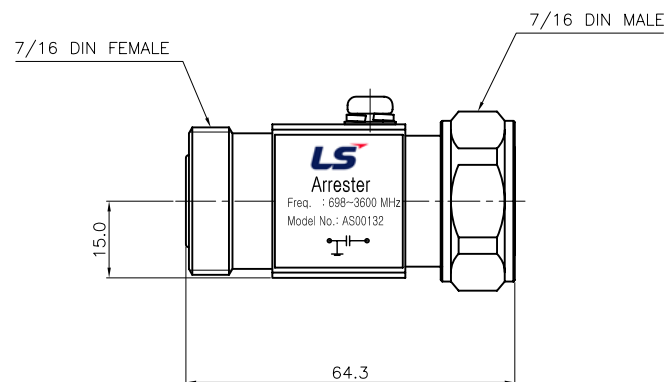



* MECHANICAL SPECIFICATIONS
HOUSING : MBsBD
CONNECTORS PINS : Beryllium Copper
INSULATORS : TEFLON

* ENVIROMENTAL SPEC
IP-67
Salt Test : KS D 9502 : 2009,96hr
Operating Temperature Range :
-40.0℃ ~ +80.0℃ / Up to 95%

* ARRESTOR TYPE
λ/4 Type(C+Short Type)

* ETC
Label Print Color : 1 Color (BLACK)

* SERIAL NUMBER
- KYYWWXXXX
(YY : YEAR, WW: WEEK, XXXX: NUMBER)



TOLERANCE	Decimal ±0.3	DATE 2015. 08. 10.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017 KJ COMTECH CO.,LTD.		TITLE ARRESTER
	Angle ±1°	APPROVED BY J.H.YOUN			
MATERIAL MBsBD(C3604BD-F)	FINISH SUCO Plate	CHECKED BY T.J.KIM	DWG NO. AS00132-7/1		
		DRAWN BY S.L.SON			
SCALE 1/1		UNIT mm	 A3	REVISION 1	SHEET 1 of 1