

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	T.J.KIM	J.H.YOUN	2015.09.02.
2	LOGO 변경	S.L.SON	J.H.YOUN	2015.10.05.

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 698~3600 MHz
 Impedance : 50.0Ω
 Insertion Loss(Max.) : -0.2dB
 V.S.W.R(Max.): 1.25:1
 PIMD : -155.0dBc (@43dBm 2Tone)
 RF Power : 500 W Peak, 250Watt Avg.
 Surge Test : 20kA (10/350us), 50kA (8/20us)


* MECHANICAL SPECIFICATIONS
 HOUSING : MBsBD
 CONNECTORS PINS : Beryllium Copper
 INSULATORS : TEFLON

* ENVIROMENTAL SPEC
 IP-67
 Salt Test : KS D 9502 : 2009,96hr
 Operating Temperature Range :
 -40.0℃ ~ +80.0℃ / Up to 95%

* ARRESTOR TYPE
 λ/4 Type(C+Short Type)

* ETC
 Label Print Color : 1 Color (BLACK)

* SERIAL NUMBER
 - KYYWWXXXX
 (YY : YEAR, WW: WEEK, XXXX: NUMBER)

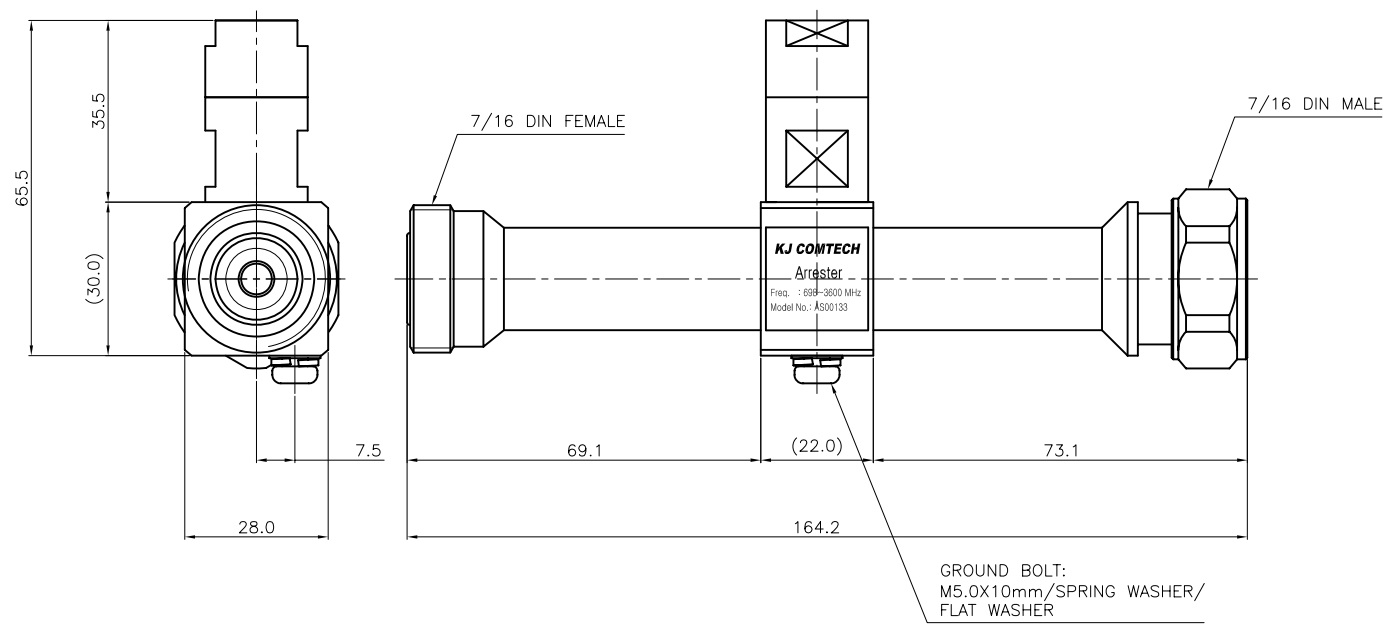

TOLERANCE	Decimal ±0.3	DATE 2015. 10. 05.	 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	TITLE ARRESTER
	Angle ±1°	APPROVED BY J.H.YOUN		
MATERIAL MBsBD(C3604BD-F)	FINISH SUCO Plate	CHECKED BY T.J.KIM	DWG NO. AS00133-7/2 REVISION 1 SHEET 1 of 1	
		DRAWN BY S.L.SON		