

5/8-24 UNEF-2A

ø20.0

GASKET

1/4-36 UNS-2A

4-ø3.2 THRU

ø19.0

17.5

32.2


43.5

6.0

8.3

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	H.J.LEE	I.C.KIM	2015. 12. 08.

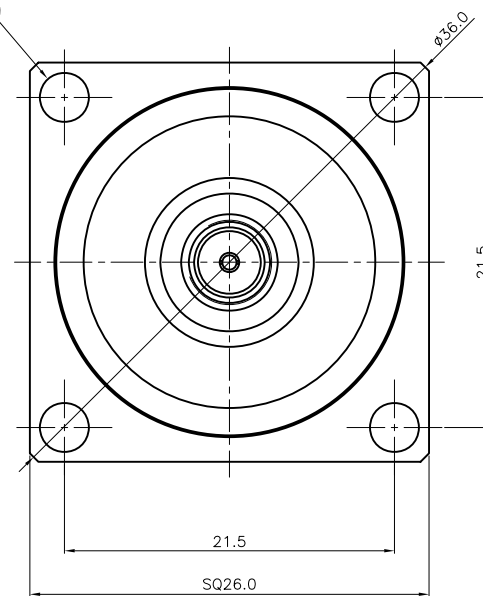

* MATERIAL & FINISHES

-BODY : BRASS / Nickel Plated

-CONTACT : Beryllium copper / Gold Plated

* ELECTRICAL SPECIFICATIONS

Frequency Range : 800~1,000MHz


Insertion Loss (Max.) : 0.2 dB

V.S.W.R (Max.) : 1.2 : 1

Impedance : 50Ω

Surge Protection Capability

: 6kV(1.2/50μs) / 3kA (8/20μs)



LABEL 부착 외관도

14	LABEL	1	은무데드롱		DLA00676-8/1
13	PAD	2	잘연테이프		DIT00012-N/1
12	CIRCLE PLATE	1	A5052	Silver Plate	DCA00028-5/1
11	GASKET	1	SILICONE RUB		DGK00145-N/1
10	GASKET	1	SILICONE RUB		DGK00045-N/1
9	JOINT PIN (B)	1	MBsBD C3604BD-F	Gold Plate	DCT03608-5/1
8	JOINT PIN (A)	1	MBsBD C3604BD-F	Gold Plate	DCT03607-5/1
7	INSULATOR	1	TEFLON		DIN02695-N/1
6	INSULATOR	1	TEFLON		DIN02694-N/1
5	CONTACT (C)	1	BeCu C17300	Gold Plate	DCT03606-5/1
4	CONTACT (B)	1	MBsBD C3604BD-F	Gold Plate	DCT03605-5/1
3	CONTACT (A)	1	BeCu C17300	Gold Plate	DCT03604-5/1
2	BODY(B)	1	MBsBD C3604BD-F	Nickel Plate	DBD04086-5/1
1	BODY(A)	1	MBsBD C3604BD-F	Nickel Plate	DBD04087-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE	2015. 12. 08.
	Angle	APPROVED BY	I.C.KIM
MATERIAL	±0.1	CHECKED BY	S.M.LEE
	±1°	DRAWN BY	H.J.LEE
FINISH		SCALE	3/1
		UNIT	mm

DATE		2015. 12. 08.	
APPROVED BY		I.C.KIM	
CHECKED BY		S.M.LEE	
DRAWN BY		H.J.LEE	
SCALE		3/1	
UNIT		mm	
TITLE		NJ SMAJ 4H (1/4λ) ARRESTOR 800~1,000 MHz	
DWG NO.		AS00137-7/1	
REVISION		I R	
SHEET		1 of 1	

RF & MICROWAVE
TECHNOLOGY
Tel : 82-32-347-8015
Fax : 82-32-347-8017