

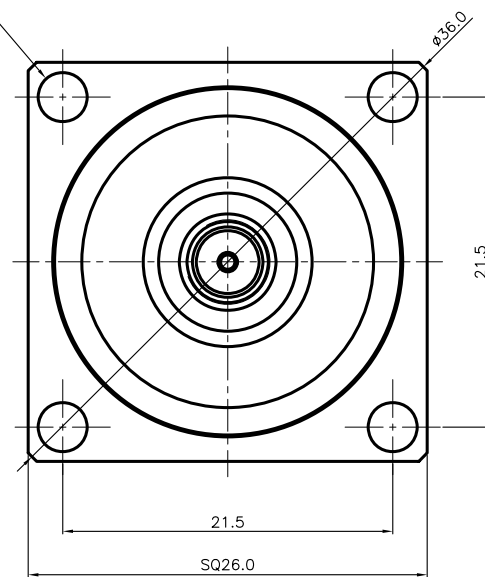


REVISION				
REV	DESCRIPTION	DRAWN	APPH	DATE
1	Initial Registration	S.Y.EUN	I.C.KIM	2019. 05. 17.
2	(출원제안 No. 202203-0009) (조립시 GASKET 확인, 관측부 외관 사이즈 수정)	S.H.KIM		2022. 03. 16.

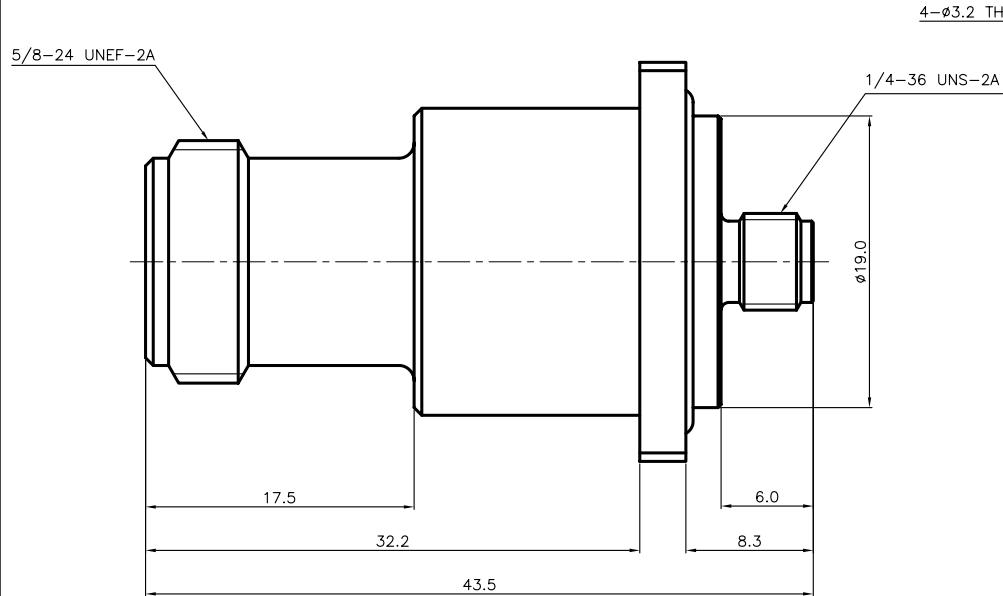


- * MATERIAL & FINISHES
 -BODY : BRASS / Nickel Plated
 -CONTACT : Beryllium copper / Gold Plated
- * ELECTRICAL SPECIFICATIONS
 Frequency Range : 800~1,000MHz
 Insertion Loss (Max.) : 0.25 dB
 V.S.W.R (Max.) : 1.2 : 1
 Impedance : 50Ω
 Surge Protection Capability
 : 6kV(1.2/50μs) / 3kA (8/20μs)

※ AS00137-7/1 + CA09314-7/1 조립 시 주의사항

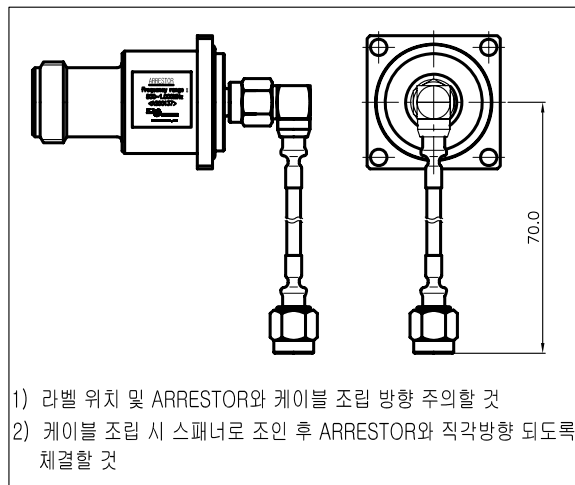

- 라벨 위치 및 ARRESTOR와 케이블 조립 방향 주의할 것
- 케이블 조립 시 스페너로 조인 후 ARRESTOR와 직각방향 되도록 체결할 것



LABEL 부착 외관도

15	CABLE	1	—	—	CA09314-7/1
14	LABEL	1	은무데드롱		DLA00676-8/1
13	PAD	2	절연테이프		DIT00012-N/1
12	CIRCLE PLATE	1	A5052	Silver Plate	DCA00028-5/1
11	GASKET	1	SILICONE RUB		DGK00145-N/1
10	GASKET	1	SILICONE RUB		DGK00045-N/1
9	JOINT PIN (B)	1	MBsBD C3604BD-F	Gold Plate	DCT03608-5/1
8	JOINT PIN (A)	1	MBsBD C3604BD-F	Gold Plate	DCT03607-5/1
7	INSULATOR	1	TEFLON		DIN02695-N/1
6	INSULATOR	1	TEFLON		DIN02694-N/1
5	CONTACT (C)	1	BeCu C17300	Gold Plate	DCT03606-5/1
4	CONTACT (B)	1	MBsBD C3604BD-F	Gold Plate	DCT03605-5/1
3	CONTACT (A)	1	BeCu C17300	Gold Plate	DCT03604-5/1
2	BODY(B)	1	MBsBD C3604BD-F	Nickel Plate	DBD04086-5/1
1	BODY(A)	1	MBsBD C3604BD-F	Nickel Plate	DBD04087-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE	2022. 03. 16.
	Angle	APPROVED BY	
MATERIAL	±0.2	CHECKED BY	
	±1°	DRAWN BY	S.H.KIM
FINISH		SCALE	3/1
		UNIT	mm

		RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
TITLE		NJ SMAJ 4H (1/4λ) ARRESTOR	
		800~1,000 MHz	
DWG NO.		AS00137-7/2	
REVISION		1	
SHEET		1 of 1	