
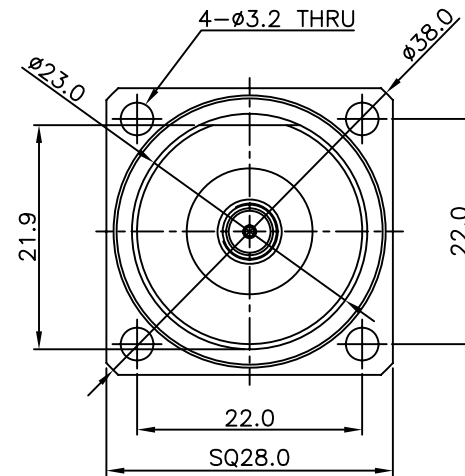


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	I.C.KIM		2016. 11. 10.

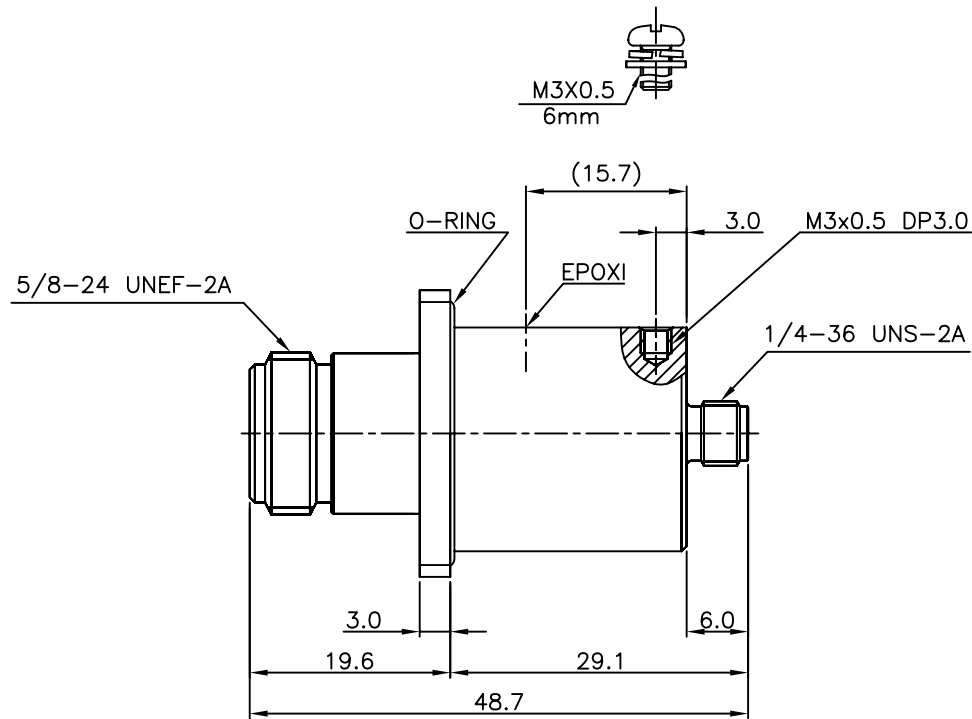

* ELECTRICAL SPECIFICATIONS

Impedance : 50Ω (Nominal)

Frequency Range : 1,200MHz~1,900MHz

Insertion Loss (Max.) : 0.3dB

V.S.W.R (Max.) : 1.2 : 1

Type : Gas Capsule Type

DC Break down Voltage : 230V ±20%

Surge current : 1.2x50μs 6kV/3kA

Power Rating [(AVG) Max] : 100W

Operating Temp. : -40 ~ +85

		NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE
TOLERANCE	Decimal	DATE 2016. 11. 10.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	Angle	APPROVED BY					
MATERIAL	±1°	CHECKED BY			TITLE NJ SMAJ 4H(Gas) ARRESTOR 1,200MHz~1,900MHz		
		DRAWN BY I.C.KIM					
FINISH		SCALE	2/1	UNIT	A3	DWG NO. AS00138-7/2	
			mm			REVISION	I R