
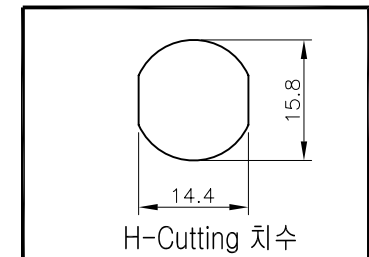
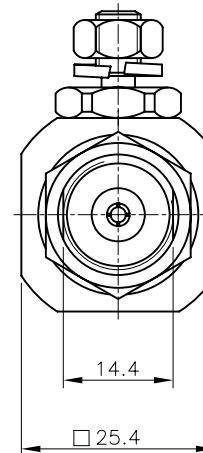


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2017.02.22.

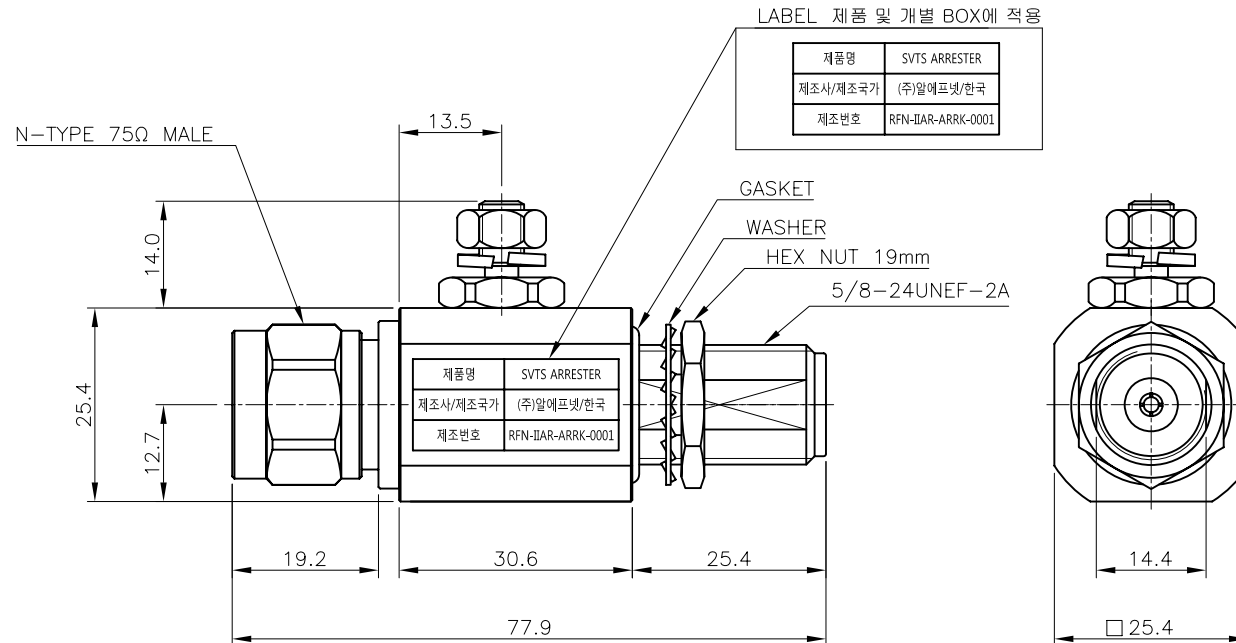

* ELECTRICAL SPECIFICATIONS

 Frequency Range : DC ~ 300MHz

 V.S.W.R (Max.) : 1.2 : 1

 Insertion Loss (Max.) : 0.3dB

 Impedance : 75Ω

 Nominal Leakage Peak Current (8/20ms) : 10kA

 Nominal Leakage AC Current (50Hz/1Sec) : 10A

 Nominal Operating DC Voltage: 350V +/- 20%

* MECHANICAL SPECIFICATIONS

 HOUSING : MBsBD (Nickel Plate)

 CONNECTORS : MBsBD (Nickel Plate)

 CONNECTORS PINS : Beryllium Copper

 (Silver Plate)

 INSULATORS : TEFLON

TOLERANCE	Decimal	DATE 2017. 02. 22.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL	±1°	CHECKED BY	T.J.KIM	TITLE ARRESTOR
	—	DRAWN BY	S.L.SON	
FINISH	—	SCALE	UNIT	DWG NO. AS00144-7/1 REVISION 1 SHEET 1 of 1
		1/1	mm	



A4