

N75 Type Arrestor

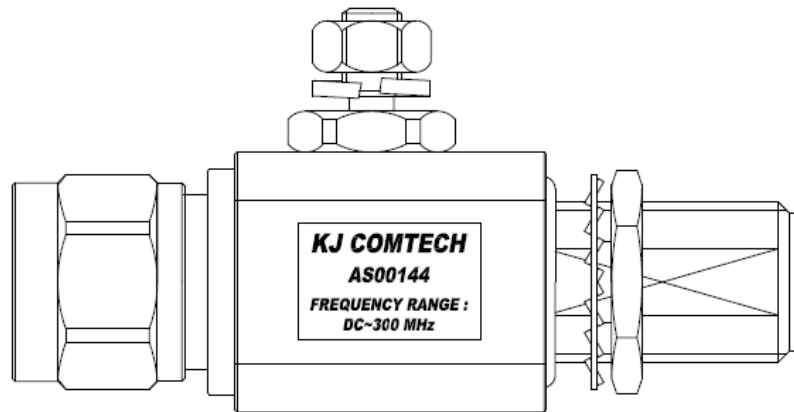


사진 1)

- KJ Comtech Code : AS00144-7/1
- N75 Type Male / N75 Type Female
- Low RF Loss

1. Electrical & Mechanical Specification

Parameter	Unit		Specifications
Frequency Range	MHz		DC ~ 300MHz
VSWR		Max.	1.2 : 1
Insertion Loss	dB	Max.	0.3
Impedance	Ω		75
Nominal Leakage Peak Current			10kA(8/20us)
Nominal Operating DC Voltage			350V $\pm$ 20%

표 1)

2. RF Data

2.1. Sample1



그림1) TR1 : IN Port VSWR, TR2: IN-OUT Insertion Loss

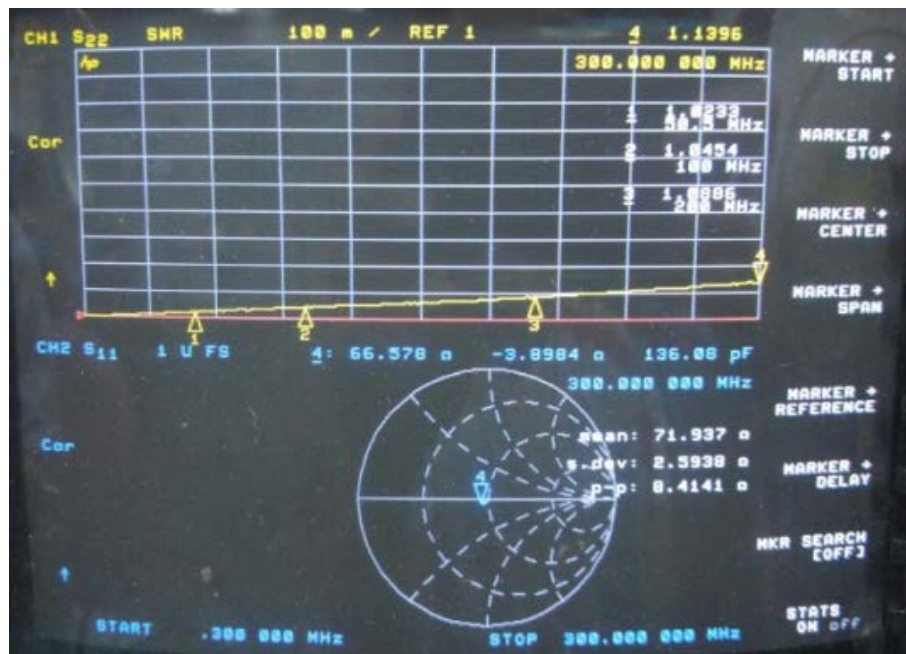


그림2) TR1 : OUT Port VSWR, TR2: Impedance

2.2. Sample2

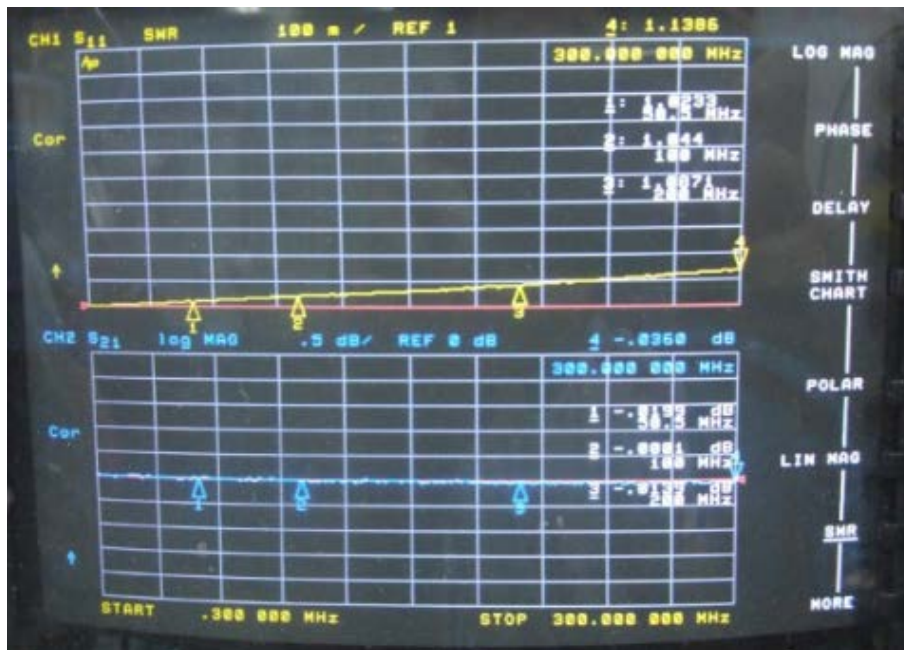


그림1) TR1 : IN Port VSWR, TR2: IN-OUT Insertion Loss

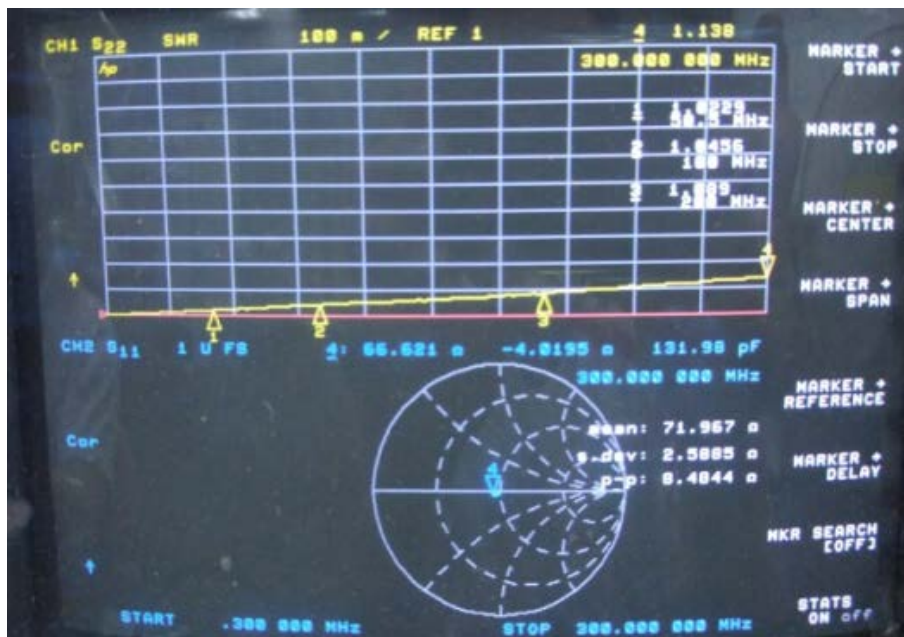


그림2) TR1 : OUT Port VSWR, TR2: Impedance