


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1	Initial Registration	S.L.SON	J.H.YOUN	2018.01.23.
2	형상변경 AL TYPE	S.L.SON	J.H.YOUN	2018.01.23.

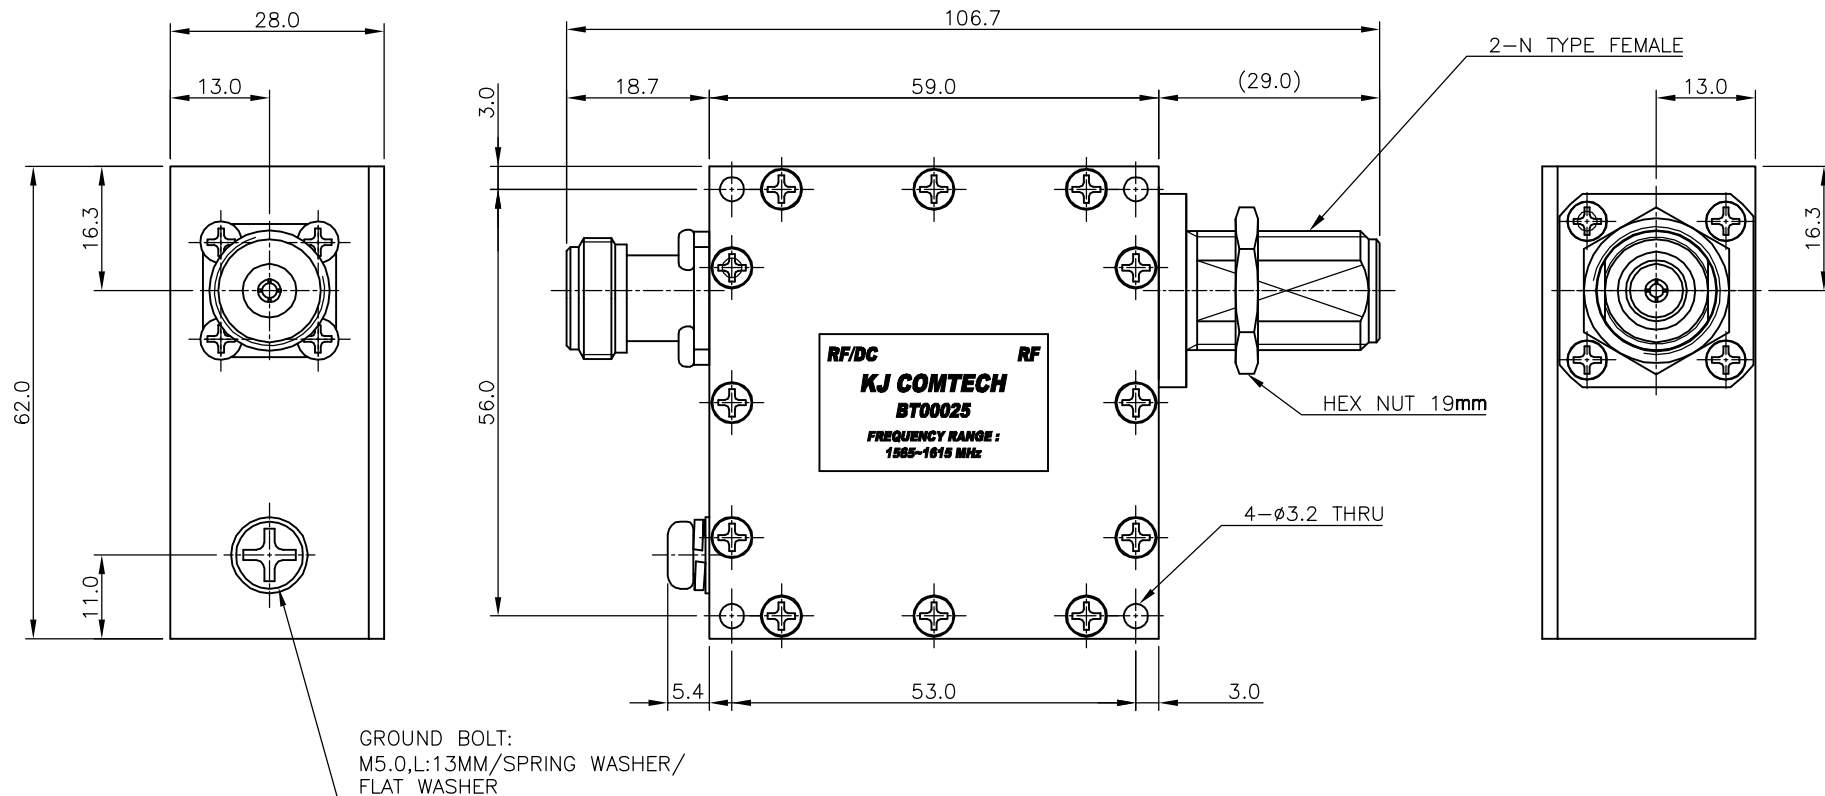

* ELECTRICAL SPECIFICATIONS
 Frequency Range : 1565~1615 MHz
 Insertion Loss (Max.) : 0.3dB
 V.S.W.R (Max.) : 1.20 : 1
 Maximum Surge Current:
 20KA(8/20 μ s) Single 1 Time
 10KA(8/20 μ s) Multiple 10 Time @3분 간격 재인가
 Residual Voltage(Max.) : 50V [6KA(1.2/50 μ s), 10KA(8/20 μ s)]
 RF Power (Max.) : 50.0W
 DC Voltage : 60.0V
 Impedance : 50.0 Ω

* ENVIRONMENTAL SPEC
 Operating Temperature(°C) : -45~+85
 Corrosion(Salt Spray): 96Hr
 Environmental: ClassP 67

* MECHANICAL SPECIFICATIONS
 HOUSING : A6061 (DIC-547)
 CONNECTORS : MBsBD (Ni Plate)
 CONNECTORS PINS : Beryllium Copper (Silver Plate)
 INSULATORS : TEFLON

TOLERANCE	Decimal	DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	± 0.3	2018. 01. 23.				
	Angle	APPROVED BY	J.H.YOUN			
MATERIAL	$\pm 1^\circ$	CHECKED BY				TITLE
	A6061	DRAWN BY				
	FINISH	DIC-547	SCALE	UNIT		
		1/1	mm			
DWG NO. AS00146-7/2						
REVISION 1 SHEET 1 of 1						