
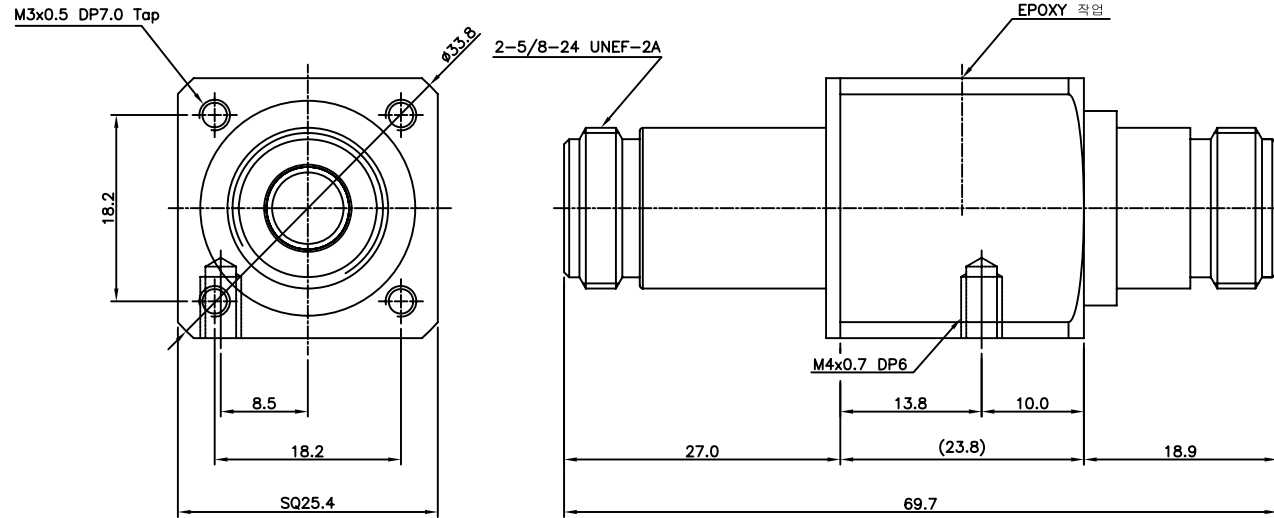


REVISION					
REV	DESCRIPTION	DRAWN	APPR	DATE	
1	Initial Registration	I.C.KIM		2020.09.18.	
2	특성개선으로 인한 GAS TUBE 및 커버 변경	S.Y.EUN	I.C.KIM	2020.10.08.	

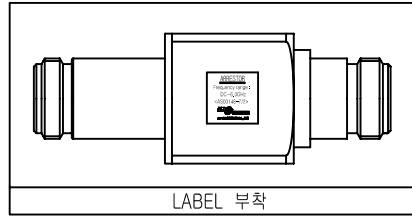

■ ELECTRICAL SPECIFICATIONS

Frequency Range : DC~3GHz

Insertion Loss (Min.) : -0.3dB

V.S.W.R (Max.) : 1.2

Impedance : 50 Ω

방수 : IP67

Impulse Discharge Voltage : 6kV(1.2/50 μ s) / 3kA (8/20 μ s)

DC Breakdown Voltage : 2100V $\pm$ 20%

Operating Temperature Range : -30.0 $^{\circ}$ C ~ +85.0 $^{\circ}$ C

13	EPOXY (경화제519)	1	—	—	CAD00021-N/2 (경화제_519)
12	EPOXY (주제519)	1	—	—	CAD00021-N/1(주제_519)
11	LABEL	1	은무데드롱		DLA00774-8/2
10	COVER	1	MBsBD C3604BD-F	Nickel Plate	DCS00063-5/4 DCS00063-5/2
9	GAS TUBE	1	—	—	DGT00002-N/1 DGT00016-N/1
8	INSULATOR	1	TEFLON		DIN03160-N/1
7	INSULATOR	1	TEFLON		DIN03053-N/1
6	GASKET	1	SILICONE RUB	BLACK	DGK00079-N/1
5	GASKET	1	SILICONE RUB	RED	DGK00042-N/2
4	CONTACT	2	BeCu C17300	Gold Plate	DCT03664-5/1
3	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT04155-5/1
2	BODY(B)	1	MBsBD C3604BD-F	Nickel Plate	DBD04660-5/1
1	BODY(A)	1	MBsBD C3604BD-F	Nickel Plate	DBD04659-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.3	DATE 2020. 10. 08.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8815 Fax : 82-32-347-8817
	Angle ±1°	APPROVED BY I.C.KIM		
MATERIAL	CHECKED BY		TITLE ARRESTER NJ NJ (Gas) 50ohm	
	DRAWN BY S.Y.EUN			
FINISH	SCALE 2/1	UNIT mm		A3
			REVISION 1	SHEET 1 of 1